



Tecnología que devuelve posibilidades.

Soluciones de equipamiento para la salud · Catálogo internacional de productos

MOVILIDAD Y REHABILITACIÓN

CUIDADO HOSPITALARIO

ODONTOLOGÍA

Contenido

LA EMPRESA

Sobre TAKUMI™ y COMSACEBE	02
Nuestra red especializada de fabricación	03
Por qué TAKUMI™	04
Soluciones a la medida y proyectos institucionales	05
Cómo trabajar con nosotros	06
Cinco pilares	07

DIVISIÓN 01 — MOVILIDAD Y REHABILITACIÓN

Apertura y manifiesto	08
Evidencia industrial de la división	10
Silla de ruedas manual	14
Silla de ruedas eléctrica	35
Scooter de movilidad	43
Coche postural infantil	49
Grúas de traslado	51
Sillón elevador eléctrico	54
Andador con ruedas	57
Silla sanitaria	62
Silla de ducha	66
Mesa de cama	68
Andadores y bastones	70
Cojines	72
Accesorios	74
Colores de estructura	76

DIVISIÓN 02 — CUIDADO HOSPITALARIO

Apertura	77
Cama UCI eléctrica multifuncional	78
Cama hospitalaria eléctrica de 5 funciones	79
Colchón de aire de presión alternante	80

DIVISIÓN 03 — ODONTOLOGÍA

Apertura	81
Unidades dentales TK-102 a TK-113	82
Lámparas de operación	98
Equipamiento de clínica y tapicería	99

Cómo leer este catálogo. Cada producto se identifica por su modelo o número de referencia. Las tablas técnicas expresan las dimensiones en centímetros y las capacidades de carga en kilogramos, salvo indicación contraria. Las cantidades de empaque se indican por contenedor de 20 pies (20GP) y de 40 pies (40GP y 40HQ).

Para cotizaciones, consultas de distribución y ventas institucionales, contacte directamente a COMSACEBE LLC: +1 786 918 0286 · ceo@comsacebe.com · www.comsacebe.com

Una empresa. Una marca. Un solo responsable.

COMSACEBE LLC es un integrador internacional de soluciones de salud. Suministramos equipos de rehabilitación, movilidad y equipamiento médico a hospitales, redes hospitalarias, distribuidores, importadores, sistemas públicos de salud y compradores institucionales, con el respaldo de nuestra plataforma industrial internacional y de nuestra experiencia comercial local desde Miami.

TAKUMI™ es nuestra marca de equipamiento para la salud. Cada producto de este catálogo —en movilidad y rehabilitación, cuidado hospitalario y odontología— se ofrece al mercado bajo TAKUMI™, con COMSACEBE LLC como contraparte comercial durante todo el proceso, desde la cotización hasta la entrega. El cliente trata con una sola empresa, un solo equipo y un solo responsable.

QUÉ INTEGRAMOS

Movilidad y Rehabilitación — sillas de ruedas, scooters, grúas, ayudas para la marcha y equipos de vida diaria. **Cuidado Hospitalario** — camas hospitalarias y de UCI, cuidado del paciente y superficies antiescaras. **Odontología** — unidades dentales, lámparas y equipamiento de clínica.

A QUIÉN ATENDEMOS

Hospitales y redes hospitalarias · Centros de rehabilitación · Distribuidores e importadores · Entidades gubernamentales y de salud pública · Aseguradoras y redes de atención · Programas institucionales de compra a gran escala.

ARQUITECTURA DE MARCA

COMSACEBE LLC — integrador de salud y socio comercial.
TAKUMI™ — marca de equipamiento para la salud.
Tres divisiones especializadas, cada una producida con su propio socio industrial especializado.

MERCADOS COMERCIALES

Estados Unidos · Colombia · Ecuador.
Venta institucional, acuerdos de distribución y suministro para licitaciones.

Nuestra red especializada de fabricación

Cada categoría de equipamiento de salud exige una experiencia industrial distinta.

Una silla de ruedas, una cama de UCI y una unidad dental no las fabrica la misma gente, y no deberían comprarse como si así fuera. COMSACEBE integra capacidades de fabricación especializadas bajo TAKUMI™, y le da al comprador institucional una sola marca, una sola contraparte comercial y un solo camino coordinado desde la selección del producto hasta la entrega.

DIVISIÓN 01 · MOVILIDAD Y REHABILITACIÓN

Se produce en nuestra plataforma especializada de fabricación en movilidad. Su capacidad industrial, su historia y su alcance internacional se presentan dentro de la división.

DIVISIÓN 02 · CUIDADO HOSPITALARIO

Se produce con un socio industrial especializado en camas hospitalarias y equipamiento de cuidado del paciente.

DIVISIÓN 03 · ODONTOLOGÍA

Se produce con un socio industrial especializado en unidades dentales y equipamiento de clínica.

UN SOLO RESPONSABLE

Sea cual sea la división de la que se surta el proyecto, COMSACEBE LLC sigue siendo la única contraparte comercial, desde la cotización hasta la coordinación de posventa.

La capacidad industrial, las certificaciones y la trayectoria de suministro se declaran dentro de la división a la que pertenecen. Nunca se presentan como capacidades compartidas entre divisiones.

POR QUÉ TAKUMI™

Fabricación especializada. Integrada por COMSACEBE. Entregada bajo TAKUMI™.

Cada categoría de equipamiento de salud exige una experiencia industrial distinta. Una silla de ruedas, una cama de UCI y una unidad dental no las fabrica la misma gente, y no deberían comprarse como si así fuera. **TAKUMI™** reúne capacidades de fabricación especializadas bajo una sola arquitectura comercial y de producto, coordinada por **COMSACEBE LLC**: una relación de suministro en vez de tres, una contraparte técnica en vez de varias, y un solo responsable en todas las divisiones.

01

RED DE FABRICACIÓN ESPECIALIZADA

Cada división se produce con un socio industrial especializado en esa familia de equipos. La capacidad industrial, las certificaciones y la trayectoria de suministro se declaran dentro de la división a la que pertenecen y nunca se presentan como compartidas.

02

CAPACIDAD DE PRODUCCIÓN DEDICADA

Dentro de la división de Movilidad y Rehabilitación, una porción dedicada de la capacidad de producción anual se destina a los programas TAKUMI™, lo que permite planificar la producción y coordinar los tiempos de entrega para volúmenes institucionales.

03

INDUSTRIA GLOBAL, MERCADO LOCAL

La red de fabricación aporta escala de producción, experiencia de suministro internacional y configuraciones de producto estandarizadas. COMSACEBE aporta experiencia en el mercado ecuatoriano, conocimiento institucional y comercial, y desarrollo comercial en Colombia y Estados Unidos, con una sola contraparte responsable en todo el proceso.

04

SOPORTE INTEGRAL DE MERCADO

- Selección y configuración del portafolio
- Fichas técnicas y documentación de producto
- Soporte y coordinación de documentación regulatoria
- Marcado TAKUMI™ y coordinación de marca propia
- Cotización y planificación de producción
- Coordinación logística
- Soporte a ventas institucionales y documentación para licitaciones
- Coordinación comercial de posventa
- Soporte de repuestos según modelo y disponibilidad del mercado

Costo competitivo. Calidad controlada. Un solo responsable.

En lugar de gestionar por separado la búsqueda de fábrica, la selección de producto, la coordinación técnica, el marcado de marca propia, la documentación, la coordinación del soporte regulatorio, la planificación de producción y la logística —en tres categorías de equipamiento distintas—, usted coordina todo a través de un solo socio.

Alcance regulatorio. COMSACEBE acompaña a distribuidores y socios institucionales con la documentación técnica y la coordinación necesarias para los procesos de registro sanitario y regulatorios en su mercado de destino. El resultado del registro depende en todos los casos de la autoridad de cada mercado.

SOLUCIONES TAKUMI™ HECHAS A LA MEDIDA

Del producto estándar a una solución desarrollada para su proyecto.



Soluciones estándar cuando encajan. Soluciones a la medida cuando el proyecto exige más.

Para proyectos institucionales con requerimientos clínicos, operativos o de mercado específicos, TAKUMI™ y COMSACEBE coordinan configuraciones a la medida con el fabricante especializado de la división correspondiente para desarrollar soluciones alrededor de las necesidades del programa. Trabajamos con ministerios y autoridades de salud, hospitales y redes hospitalarias, gobiernos locales, aseguradoras, fundaciones, distribuidores, grandes compradores privados y programas sociales o institucionales.

REQUERIMIENTO DEL PROYECTO → CONFIGURACIÓN TAKUMI →
EVIDENCIA TÉCNICA → CUMPLIMIENTO

QUÉ SE PUEDE CONFIGURAR

- Configuraciones a la medida y especificaciones institucionales
- Programas de marca propia
- Materiales y acabados especiales
- Personalización de colores
- Accesorios y adaptaciones funcionales
- Personalización del empaque
- Documentación específica del proyecto
- Planificación de producción por volumen
- Requerimientos del mercado de destino

MATRIZ DE CUMPLIMIENTO TÉCNICO

Una matriz que vincula cada requerimiento del proyecto con la configuración TAKUMI™, su evidencia técnica y su estado de cumplimiento.

Las configuraciones a la medida se desarrollan según los requerimientos del proyecto y la viabilidad de fabricación, sujetas a factibilidad técnica, volumen y validación de manufactura.

Cómo trabajar con nosotros

Los productos TAKUMI™ son suministrados por COMSACEBE LLC. Desde la primera consulta hasta la entrega en su institución, usted trata con una sola empresa y un solo equipo, incluyendo documentación técnica, coordinación del soporte regulatorio y acompañamiento institucional o en licitaciones cuando corresponda.

01

ANÁLISIS DE NECESIDAD

Población objetivo, entorno de uso, volúmenes y requerimientos del programa.

02

SELECCIÓN O CONFIGURACIÓN TÉCNICA

Selección desde el catálogo o configuración coordinada con el fabricante especializado.

03

DOCUMENTACIÓN Y SOPORTE REGULATORIO

Fichas técnicas, matrices de cumplimiento y coordinación de la documentación regulatoria para el mercado de destino.

04

PROTOTIPO / VALIDACIÓN

Muestra, prototipo o validación de preproducción cuando el proyecto lo requiera.

05

COTIZACIÓN Y CONDICIONES COMERCIALES

Precio por unidad y por contenedor, Incoterms, coordinación de tiempos de entrega y condiciones de pago.

06

PRODUCCIÓN Y MERCADO TAKUMI™

Planificación de producción con el fabricante correspondiente, con marcado TAKUMI™ y empaque cuando así se acuerde.

07

LOGÍSTICA Y ENTREGA

Consolidación, documentación de embarque y entrega en Estados Unidos, Colombia o Ecuador.

08

COORDINACIÓN COMERCIAL DE POSVENTA

Coordinación de repuestos según modelo y disponibilidad de mercado, y continuidad de la relación comercial.

COMSACEBE LLC

INTEGRADORES DE SALUD

+1 786 918 0286

ceo@comsacebe.com

www.comsacebe.com

2150 N Bayshore Dr, Miami, FL 33137

Cinco pilares

01

SEGURIDAD

Cada producto se selecciona y se entrega para que la persona y quien la acompaña se muevan con confianza. Las prestaciones de seguridad de cada modelo se detallan en su propia ficha técnica.

02

AUTONOMÍA

La movilidad empieza cuando alguien deja de depender de otros. Nuestro portafolio prioriza configuraciones que devuelven el control a la persona.

03

CONFORT

El confort no es un lujo. Es la condición para usar un equipo durante horas, todos los días, sin renunciar al bienestar.

04

DURABILIDAD

Equipos pensados para uso institucional sostenido, con soporte de repuestos según el modelo y la disponibilidad de cada mercado, y coordinación comercial de posventa.

05

DIGNIDAD

Un equipo de movilidad se ve, se lleva y se habita. Elegimos productos que la persona pueda usar con orgullo, no solo con resignación.

01

DIVISIÓN 01

Movilidad y Rehabilitación

MOBILITY
BEYOND
MOVEMENT™ ·
MOVILIDAD QUE
VA MÁS ALLÁ DEL
MOVIMIENTO

Sillas de ruedas, scooters, grúas y equipos de vida diaria para hospitales, centros de rehabilitación y programas institucionales de movilidad. La división donde nació TAKUMI™.

SILLAS MANUALES

SILLAS ELÉCTRICAS

SEDESTACIÓN POSTURAL

SCOOTERS

COCHES POSTURALES

GRÚAS

SILLONES ELEVADORES

ANDADORES CON RUEDAS

SILLAS SANITARIAS

SILLAS DE DUCHA

ANDADORES Y BASTONES

COJINES

ACCESORIOS

CON EL RESPALDO DE NUESTRA PLATAFORMA ESPECIALIZADA DE FABRICACIÓN EN MOVILIDAD

UNA NUEVA FORMA DE MOVERSE

El movimiento es el principio de toda libertad.

Antes de hablar de un producto, hablamos de una convicción: cada persona merece moverse con autonomía, comodidad y orgullo. Lo que sigue es un catálogo de especificaciones, pero la razón por la que existe es más simple. Entregamos más que soluciones de movilidad. Ayudamos a devolver la independencia.

TAKUMI™ es la forma en que COMSACEBE nombra esa intención: movilidad que va más allá del movimiento.

TAKUMI™ — MOBILITY BEYOND MOVEMENT™

Nuestro grupo industrial de movilidad

Nuestro grupo industrial aporta tres décadas de desarrollo industrial y experiencia internacional al mercado de la salud. Es una organización de manufactura de alta tecnología dedicada a la investigación, el desarrollo, la producción y la comercialización de insumos y equipamiento médico.

10

Bases de I+D y producción

10,000+

Empleados a nivel global

145+

Países y regiones atendidos

10,000+

Clientes a nivel global

3

Divisiones de negocio

7

Centros de comercialización globales

El grupo opera tres divisiones de negocio —insumos médicos, equipos de rehabilitación y terapia física— cuyos productos se utilizan en instituciones médicas, instituciones de cuidado y atención domiciliaria en América, Europa, Asia, África y Oceanía.

La división de equipos de rehabilitación es la base industrial de este catálogo. Sus operaciones especializadas, su capacidad y su alcance internacional se presentan en la página siguiente.

Cifras según registros de nuestro socio industrial de movilidad. Alcance temporal pendiente de confirmación.

Nuestras operaciones de fabricación en rehabilitación

Nuestras instalaciones de fabricación combinan capacidad de producción a gran escala, investigación y desarrollo, tecnologías avanzadas de manufactura y experiencia internacional para atender el mercado global de la salud. Constituyen la plataforma industrial especializada que respalda el portafolio presentado en este catálogo.

1,000,000

Sillas de ruedas manuales ·
capacidad anual

50,000

Sillas de ruedas eléctricas ·
capacidad anual

Cientos

de máquinas automatizadas

72+

Países y regiones abastecidos

5

Centros de comercialización en el
exterior

2004

Base de fabricación de sillas de
ruedas establecida

Investigación, producción y comercialización bajo un mismo techo

Nuestras operaciones de fabricación en rehabilitación funcionan como centro de investigación, producción y comercialización de equipos de rehabilitación y productos de terapia. La planta se especializa en sillas de ruedas manuales y eléctricas, scooters de movilidad, equipos de traslado, ayudas para la marcha, sillas sanitarias y bastones, entre otros.

Presencia global

72 PAÍSES Y REGIONES · 5 CENTROS EN EL EXTERIOR



La ruta marcada une nuestra plataforma industrial internacional con Miami, y Miami con Colombia y Ecuador: el recorrido del suministro y de la contraparte comercial COMSACEBE.

Países y regiones abastecidos por nuestras operaciones de fabricación en rehabilitación. Nuestra plataforma industrial internacional respalda la distribución de soluciones de rehabilitación y movilidad en América, Europa, Asia, África y Oceanía.

Europa

Belgium, Bosnia and Herzegovina, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Finland, France, Germany, Greece, Hungary, Ireland, Italy, Lithuania, Malta, Netherlands, Poland, Portugal, Romania, Russia, Serbia, Slovakia, Slovenia, Spain, Switzerland, Ukraine, UK

Asia

China, Hongkong (China), India, Israel, Japan, Jordan, Kazakhstan, Kuwait, Lebanon, Malaysia, Mongolia, Palestine, Philippines, Saudi Arabia, Singapore, South Korea, Taiwan (China), Turkey, United Arab Emirates

África

Burundi, Eswatini, South Africa, Tunisia, Uganda

América del Norte

Canada, Costa Rica, Dominica, Dominican Republic, El Salvador, Guatemala, Jamaica, Mexico, Panama, USA

América del Sur

Argentina, Bolivia, Brazil, Chile, Ecuador, Paraguay, Uruguay, Venezuela

Oceanía

Australia, New Zealand

MERCADOS COMERCIALES DE COMSACEBE

Estados Unidos
Colombia
Ecuador

COMSACEBE acerca este alcance industrial internacional a los compradores institucionales de sus tres mercados comerciales, con soporte comercial local desde Miami, Florida, y una sola contraparte comercial para la cotización, el suministro y la coordinación de posventa.

Evolución de nuestra plataforma industrial

Dos décadas de expansión continua de nuestras operaciones de fabricación en rehabilitación, desde la primera base de fabricación de sillas de ruedas hasta una plataforma industrial multifase con producción automatizada.

2004 Base de fabricación de sillas de ruedas establecida	2006 Fase 1: 22,200 m²	2009 Ampliación de la producción automática	2014 Fase 2: 22,200 m²
2017 Inicio de construcción de una nueva planta con una superficie de 728,434 m²	2019 Fase 3: 14,313 m²	2020 Fase 4: 19,955 m²	2021 Fase 5: la superficie total de la planta alcanzará 200,000 m²
2022 Edificio de 53,000 m² (oficinas y área integral)	2023 6 edificios añadidos, con una superficie construida total de 19,351 m²	2024 1 edificio en construcción, con una superficie de 18,418 m²	

Nota sobre las superficies industriales. Las cifras de superficie que siguen se reproducen literalmente de los registros de nuestro socio industrial. Su clasificación —superficie de terreno, superficie construida o superficie de planta— está pendiente de confirmación por parte del socio y por ello no se interpreta aquí.



01

DIVISIÓN 01 · MOVILIDAD Y REHABILITACIÓN

Sillas de ruedas manuales

Autonomía diaria, medida a medida.

LA NECESIDAD

Una persona quiere entrar y salir de casa sin depender de nadie.

LA RESPUESTA TAKUMI™

Gama de anchos de asiento de 12" a 24", con estructura de aluminio o acero, respaldo plegable, reposapiés desmontables y aros propulsores.

LA DIFICULTAD

La silla que no corresponde a su medida cansa, roza y limita el recorrido del día.

LA EVIDENCIA

Cada modelo declara ancho y profundidad de asiento, altura de respaldo, capacidad de carga, peso y medidas de plegado en su tabla dimensional.

Compare medidas de asiento y capacidad, y solicite la configuración por volumen.

CATEGORÍA 01 DE 12

TK-001


ALUMINIO

NEW

/ FRAME	Double cross braces, powder coating
/ FRONT WHEEL	6"/8" PU tires
/ REAR WHEEL	14"/22"/24" spoke wheel, PU tire, aluminum handrim
/ ARMREST	Fixed slope/Detachable armrest PU armpad
/ FOOTREST	Fixed/Detachable footrest, Leg support
/ SEAT AND BACKREST	Mesh bottom upholstery + Breathable upholstery cover
/ FRONT FORK	Plastic
/ FOOTPLATE	Plastic
/ SPECIAL	Backrest half folding; Quick release; Attendant hand brakes; Anti-tipper



Product features

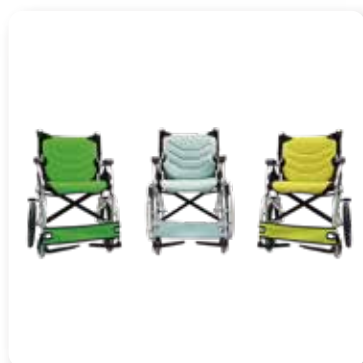

Available in multiple colors



Lightweight, foldable design



Multiple wheel size adaptation

ITEM NO.	Model	Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Overall Width Folded	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Seat Height (cm)	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	Net Weight (kg)	Carton Size (cm)
TK-001	Fixed armrest & footrest	82.5	59.5	91.5	25.5	43	42	/	48.5	120	6"	14"	10	87x26.5x75.5
		96	64.5	91.5	27	43	42	/	48.5	120	6"	22"	10.8	97x28x75
		98.5	64.5	94	27	43	42	/	51	120	8"	24"	11	99.5x28x77.5
	Fixed armrest & detachable footrest	82.5	59.5	91.5	25.5	43	42	/	48.5	120	6"	14"	10.1	66.5x26.5x75
		96	64.5	91.5	27	43	42	/	48.5	120	6"	22"	10.9	76.5x28x75
		98.5	64.5	94	27	43	42	/	51	120	8"	24"	11.1	79x28x77.5
	Detachable armrest & footrest	91.5	59.5	91.5	25.5	43	42	/	48.5	120	6"	14"	11	66.5x26.5x75
		99	64.5	91.5	28	43	42	/	48.5	120	6"	22"	11.8	76.5x29x75
		101.5	66.5	94	28	43	42	/	51	120	8"	24"	12	79x29x77.5

TK-002 ACERO

NEW

/ FRAME	Single cross brace, powder coating
/ FRONT WHEEL	6" x 1" / 8" x 1" PVC tire
/ REAR WHEEL	22" MAG wheel/ 24" MAG wheel/24" spoke wheels, PU tires
/ ARMREST	Fixed full length armrest
/ FOOTREST	Detachable footrest
/ SEAT AND BACKREST	Nylon
/ FRONT FORK	Plastic
/ FOOTPLATE	Plastic
/ PACKAGE	180 pcs/ 20GP, 477 pcs/ 40HQ(22") ; 170 pcs/ 20GP, 378 pcs/ 40HQ(24")
/ SPECIAL	Simple backrest half folding



ITEM NO.	SIZE	Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Overall Width Folded (cm)	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height (cm)	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	G./N. Weight (kg)	Carton Size (cm)
TK-002	18"	92	60	91	23	46	40.5	45	46	100	6"	22"	15.5/13.5	71x24x74
	18"	102	63	99	26	46	40.5	45	53	100	8"	24"(MAG)	17.5/15.0	78x27x81.5
TK-002	18"	98	63	95	25	46	40.5	45	46.5	100	6"	24"(spoke)	17.0/15.0	78x27x79

TK-003 ALUMINIO

NEW

/ FRAME	Single cross brace; Powder coating / liquid painting
/ FRONT WHEEL	7"x1.25", PU tire
/ REAR WHEEL	24", spoke wheel, PU tire, quick release
/ ARMREST	Flip back& detachable armrest, height adjustable
/ FOOTREST	Swing away / Elevating legrest
/ SEAT AND BACKREST	Flame-retardant nylon with sponge
/ FRONT FORK	Aluminum
/ FOOTPLATE	PP / Nylon
/ SPECIAL	Adjustable rear wheels at the front and rear; Seat depth adjustable; Seat height adjustable; Height adjustable armrest; Quick release; Height adjustable backrest; Anti-tipper wheels



ITEM NO.	SIZE	Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Overall Width Folded (cm)	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height (cm)	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	G./N. Weight (kg)	Carton Size (cm)
TK-003 K5	18"	110-115	68	91±2	32	46	40-45	44±2.5	50±2	120	7"	24"	16.5/14.5	81x33x80

TK-004 ACERO

/ FRAME	Single cross brace, powder coating
/ FRONT WHEEL	8"x1", PVC tire
/ REAR WHEEL	24" spoke wheels, PU tire
/ ARMREST	Fixed full length armrest, PVC armpad
/ FOOTREST	Detachable footrest, leg support
/ SEAT AND BACKREST	Flame-retardant nylon with sponge
/ FRONT FORK	Steel
/ FOOTPLATE	Plastic
/ PACKAGE	122 pcs/ 20GP, 380 pcs/ 40HQ
/ SPECIAL	Simple backrest half folding for smaller package



ITEM NO.	SIZE	Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Overall Width Folded	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	G./N. Weight (kg)	Carton Size (cm)
TK-004	14"	105	56	90	27	36.5	40	40	48	110	8"	24"	15.4/13.4	81x27x80
	18"	105	65.5	90	27	46	40	40	48	110	8"	24"	17.0/15.0	81x27x80

TK-005 ACERO

/ FRAME	Single cross brace, powder coating
/ FRONT WHEEL	8"x1", PVC tire
/ REAR WHEEL	24" spoke wheels, PU tire
/ ARMREST	Fixed full length armrest, PVC armpad
/ FOOTREST	Swing away footrest
/ SEAT AND BACKREST	Flame-retardant nylon with sponge
/ FRONT FORK	Steel
/ FOOTPLATE	Plastic
/ PACKAGE	130 pcs/ 20GP, 327 pcs/ 40HQ



ITEM NO.	SIZE	Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Overall Width Folded	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	G./N. Weight (kg)	Carton Size (cm)
TK-005	18"	105.6	65.5	90	27	46	40	41	51	110	8"	24"	20.0/18.0	83x28x94

TK-006 ACERO

/ FRAME	Single cross brace, powder coating
/ FRONT WHEEL	8"x1", PVC tire
/ REAR WHEEL	24" spoke wheels, pneumatic/ PU tire
/ ARMREST	Flip back with desk length, PVC armpad
/ FOOTREST	Swing away footrest, leg support
/ SEAT AND BACKREST	Flame-retardant nylon with sponge
/ FRONT FORK	Steel
/ FOOTPLATE	Plastic
/ PACKAGE	130 pcs/ 20GP, 326 pcs/ 40HQ
/ OPTION	Backrest half folding; Attendant brakes; Quick release; Safety belt; Anti-tipper wheels



ITEM NO.	SIZE	Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Overall Width Folded	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	G./N. Weight (kg)	Carton Size (cm)
TK-006	16"	103	58	91	26.5	40	40	41	50	120	8"	24"	20.6/18.1	81x27x94
	17"	103	60.5	91	26.5	42	40	41	50	120	8"	24"	20.8/18.3	81x27x94
	18"	103	63	91	26.5	45	40	41	50	120	8"	24"	21.0/18.5	81x27x94
	20"	103	68	91	26.5	51	40	41	50	135	8"	24"	22.5/20.0	81x27x94

TK-007 ACERO

/ FRAME	Single cross brace, powder coating
/ FRONT WHEEL	8" X 2", PU tire
/ REAR WHEEL	12", PU tire
/ ARMREST	Flip back with desk length, PVC armpad
/ FOOTREST	Swing away footrest, leg support
/ SEAT AND BACKREST	Flame-retardant nylon with sponge
/ FRONT FORK	Steel
/ FOOTPLATE	Plastic
/ PACKAGE	180 pcs/ 20GP, 431 pcs/ 40HQ
/ SPECIAL	Backrest half folding; Attendant brakes; Safety belt



ITEM NO.	SIZE	Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Overall Width Folded	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	G./N. Weight (kg)	Carton Size (cm)
TK-007	16"	92	55	96	26	40	40	45	50	100	8"	12"	17.7/15.2	76x25x79
TK-007	18"	92	60	96	26	45	40	45	50	110	8"	12"	18.1/15.6	76x25x79

TK-008 ACERO

/FRAME	Single cross brace, powder coating
/FRONT WHEEL	8"x1", PVC tire
/REAR WHEEL	24" spoke wheels, PU tire
/ARMREST	Flip back slope armrest, PVC armpad
/FOOTREST	Swing away footrest, heel support
/SEAT AND BACKREST	Flame-retardant nylon with sponge
/FRONT FORK	Plastic
/FOOTPLATE	Plastic
/PACKAGE	126 pcs/ 20GP, 326 pcs/ 40HQ
/OPTION	Backrest half folding; Attendant brakes; Anti-tipper wheels



ITEM NO.	SIZE	Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Overall Width Folded	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	G./N. Weight (kg)	Carton Size (cm)
TK-008 1	18"	103	61	91	26.5	46	40	43	50	120	8"	24"	21.5/19.0	82x27x94

TK-009 TK-010 ACERO ALUMINIO

/FRAME	Single cross brace, powder coating
/FRONT WHEEL	8", PU tire
/REAR WHEEL	24" spoke wheels, PU tire
/ARMREST	Flip back slope armrest, PU armpad
/FOOTREST	Swing in and away footrest
/SEAT AND BACKREST	Flame-retardant nylon with sponge
/FRONT FORK	Plastic
/FOOTPLATE	Plastic
/PACKAGE	24" rear wheel: 112 pcs/ 20GP, 290 pcs/ 40HQ 12" rear wheel: 141 pcs/ 20GP, 358 pcs/ 40HQ
/OPTION	Rear wheel: 12" PU tire; Backrest half folding; Attendant brakes; Safety belt; Anti-tipper wheels



ITEM NO.	SIZE	Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Overall Width Folded	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	G./N. Weight (kg)	Carton Size (cm)
TK-009	16"	111	58.4	95.5	26	41	41	45	51	135	8"	24"	18.3/16.3	87x28x95
	18"	111	63.5	95.5	26	46.2	41	45	51	135	8"	24"	18.5/16.5	87x28x95
	20"	111	68.4	95.5	26	51.1	41	45	51	135	8"	24"	18.7/16.7	87x28x95
	16"	111	58.4	95.5	26	41	41	45	51	135	8"	24"	16.2/13.7	87x28x95
TK-010	18"	111	63.5	95.5	26	46.2	41	45	51	135	8"	24"	16.4/13.9	87x28x95
	20"	111	68.4	95.5	26	51.1	41	45	51	135	8"	24"	16.6/14.1	87x28x95

TK-011 ACERO

/ FRAME	Double cross braces, powder coating
/ FRONT WHEEL	8"x2", PU tire
/ REAR WHEEL	20" spoke wheels, PU tire
/ ARMREST	Detachable slope armrest, PVC armpad
/ FOOTREST	Swing away footrest
/ SEAT AND BACKREST	Flame-retardant nylon with sponge
/ FRONT FORK	Steel
/ FOOTPLATE	Plastic
/ PACKAGE	106 pcs/ 20GP, 268 pcs/ 40HQ
/ SPECIAL	Narrow width



ITEM NO.	SIZE	Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Overall Width Folded	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	G./N. Weight (kg)	Carton Size (cm)
TK-011	16"	92	51	89	26	41	40	35	49	100	8"	20"	17.0/15.0	75x34x99.5
	17"	92	53	89	26	43	40	35	49	100	8"	20"	17.5/15.5	75x34x99.5

TK-012 ACERO

/ FRAME	Single cross brace, powder coating
/ FRONT WHEEL	8" × 1.25", PU tire
/ REAR WHEEL	24" spoke wheels, PU tire
/ ARMREST	Flip back with slope armrest, PU armpad
/ FOOTREST	Swing in and away footrest
/ SEAT AND BACKREST	Flame-retardant nylon with sponge
/ FRONT FORK	Plastic
/ FOOTPLATE	Plastic
/ PACKAGE	126 pcs/ 20GP, 280 pcs/ 40HQ
/ OPTION	Height adjustable slope armrest
/ SPECIAL	Quick release



ITEM NO.	SIZE	Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Overall Width Folded	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	G./N. Weight (kg)	Carton Size (cm)
TK-012	16"	103	60	92	30	43	35	43	49	135	8"	24"	18.5/16.5	82x31x94
	18"	103	65	92	30	46	35	43	49	135	8"	24"	18.5/16.5	82x31x94

TK-013 ACERO

/FRAME	Single cross brace, powder coating
/FRONT WHEEL	8"x1", PVC tire
/REAR WHEEL	24" MAG wheels, PU tire
/ARMREST	Detachable with desk length, PVC armpad
/FOOTREST	Swing away footrest
/SEAT AND BACKREST	Flame-retardant nylon with sponge
/FRONT FORK	Steel
/FOOTPLATE	Plastic
/PACKAGE	118 pcs/ 20 GP, 299 pcs/ 40HQ



ITEM NO.	SIZE	Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Overall Width Folded	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	G./N. Weight (kg)	Carton Size (cm)	
TK-013	K1	18"	112	66	92	30	46	40	46	50	120	8"	24"	21.6/18.1	81x27x94

TK-014 ACERO

/FRAME	Single cross brace, powder coating
/FRONT WHEEL	8"x1", PVC tire
/REAR WHEEL	24" MAG wheels, PU tire
/ARMREST	Detachable with desk length, PVC armpad
/FOOTREST	Swing away footrest, heel support
/SEAT AND BACKREST	Vinyl upholstery
/FRONT FORK	Aluminum
/FOOTPLATE	Plastic
/PACKAGE	114 pcs/ 20GP, 288 pcs/ 40HQ
/SPECIAL	Seat height adjustable



ITEM NO.	SIZE	Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Overall Width Folded (cm)	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height (cm)	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	G./N. Weight (kg)	Carton Size (cm)
TK-014	16"	112	61.5	92	30	41	41	43	49	120	8"	24"	20.5/18.2	81.5x31x93.5
	18"	112	66.5	92	30	46	41	43	49	120	8"	24"	21.0/18.7	81.5x31x93.5
	20"	112	71.5	92	30	51	41	43	49	120	8"	24"	21.6/19.3	81.5x31x93.5

TK-015 ACERO

/ FRAME	Single cross brace, powder coating
/ FRONT WHEEL	8"x1", PVC tire
/ REAR WHEEL	24" MAG wheels, PU tire
/ ARMREST	Flip back&detachable desk length, PVC armpad
/ FOOTREST	Swing away footrest, heel support
/ SEAT AND BACKREST	Flame-retardant nylon with sponge
/ FRONT FORK	Aluminum
/ FOOTPLATE	Plastic
/ PACKAGE	118 pcs/ 20GP, 280 pcs/ 40HQ
/ SPECIAL	Seat depth adjustable; Seat height adjustable; Height adjustable armrest



ITEM NO.	SIZE	Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Overall Width Folded	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	G./N. Weight (kg)	Carton Size (cm)
TK-015	16"	109	60	89	31	41	40-46	40	50	120	8"	24"	19.4/17.1	81.5x31x93.5
	18"	109	65	89	31	46	40-46	40	50	120	8"	24"	19.9/17.6	81.5x31x93.5
	20"	109	70	89	31	51	40-46	40	50	120	8"	24"	22.9/20.6	81.5x31x93.5

TK-016 ACERO

/ FRAME	Double cross braces, powder coating
/ FRONT WHEEL	8"x2", PU tire, heavy duty
/ REAR WHEEL	24" MAG wheels, PU tire, heavy duty
/ ARMREST	Detachable with desk length, PVC armpad
/ FOOTREST	Swing away footrest, heel support
/ SEAT AND BACKREST	Vinyl upholstery, extra strong
/ FRONT FORK	Aluminum, heavy duty
/ FOOTPLATE	Aluminum
/ PACKAGE	105 pcs/ 20GP, 250 pcs/ 40HQ
/ SPECIAL	Heavy duty 160kg/ 180kg



ITEM NO.	SIZE	Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Overall Width Folded	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	G./N. Weight (kg)	Carton Size (cm)
TK-016	22"	103	73	91	26.5	55	45	45	50	160	8"	24"	30.6/27.1	85x33x94
TK-016	24"	108	78	94	28	61	45	45	50	180	8"	24"	30.6/27.1	85x33x94

TK-017 ACERO

/ FRAME	Double cross braces, powder coating
/ FRONT WHEEL	8"x2", PU tire
/ REAR WHEEL	24" spoke wheels, PU tire
/ ARMREST	Flip back with desk length, PVC armpad
/ FOOTREST	Swing away footrest
/ SEAT AND BACKREST	Flame-retardant nylon with sponge, extra strong
/ FRONT FORK	Steel
/ FOOTPLATE	Nylon
/ PACKAGE	102 pcs/ 20GP, 258 pcs/ 40HQ
/ SPECIAL	Heavy duty: 150kg



ITEM NO.	SIZE	Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Overall Width Folded	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	G./N. Weight (kg)	Carton Size (cm)
TK-017	22"	103	73	91	26.5	55	45	44	50	150	8"	24"	23.0/20.5	88x28x96
	24"	108	78	94	28	61	45	45	50	150	8"	24"	25.6/23.6	88x28x96

TK-018 ACERO

/ FRAME	Single/ double cross brace, powder coating
/ FRONT WHEEL	8"x2", PU tire
/ REAR WHEEL	24" MAG wheels, PU tire
/ ARMREST	Detachable with desk length
/ FOOTREST	Elevating legrest
/ SEAT AND BACKREST	Vinyl upholstery
/ FRONT FORK	Steel
/ FOOTPLATE	Plastic
/ PACKAGE	77 pcs/ 20GP, 224 pcs/ 40HQ
/ SPECIAL	Reclining backrest 90°-180°; Headrest; Attendant brakes; Anti-tipper wheels



ITEM NO.	SIZE	Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Overall Width Folded	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	G./N. Weight (kg)	Carton Size (cm)
TK-018	18"	123	68	126	31	45	40	80	50	120	8"	24"	29.5/26.6	92x31x96
	20"	123	71.5	126	31	50.5	40	80	50	120	8"	24"	28.3/26.3	92x31x96

TK-019 ACERO

/ FRAME	Double cross braces, powder coating
/ FRONT WHEEL	12", pneumatic tire
/ REAR WHEEL	20", pneumatic tire
/ ARMREST	Fixed slope armrest, PU armpad
/ FOOTREST	Detachable footrest
/ SEAT AND BACKREST	Flame-retardant nylon with sponge
/ FRONT FORK	Steel
/ FOOTPLATE	Plastic
/ PACKAGE	94 pcs/ 20GP, 236 pcs/ 40HQ
/ SPECIAL	Move forward and backward, turn right and left smoothly



ITEM NO.	SIZE	Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Overall Width Folded	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	G./N. Weight (kg)	Carton Size (cm)
TK-019	19"	110	69	145	36	48	42.5	42	54.5	136	12"	20"	31.5/28.5	94x34x90

TK-020

TK-021 ACERO ALUMINIO

/ FRAME	Single cross brace, powder coating
/ FRONT WHEEL	8"x1", rubber tire
/ REAR WHEEL	8"x1", rubber tire
/ ARMREST	Fixed full length armrest, PVC armpad
/ FOOTREST	Swing away footrest, heel support
/ SEAT AND BACKREST	Flame-retardant nylon with sponge
/ FRONT FORK	Aluminum/ Steel
/ FOOTPLATE	Plastic
/ PACKAGE	230 pcs/ 20GP, 550 pcs/ 40HQ
/ SPECIAL	Backrest half folding; Safety belt; Hand strap



ITEM NO.	SIZE	Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Overall Width Folded	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	G./N. Weight (kg)	Carton Size (cm)
TK-020	17"	96	53	96	25.4	43	40	46	48	115	8"	8"	15.2/13.7	60x26x78
	19"	96	58	96	25.4	48	40	46	48	115	8"	8"	15.2/13.7	60x26x78
TK-021	17"	96	53	96	25.4	43	40	46	48	115	8"	8"	12.5/11.0	60x26x78
	19"	96	58	96	25.4	48	40	46	48	115	8"	8"	12.5/11.0	60x26x78

TK-022

ACERO ALUMINIO

/ FRAME	Single cross brace, powder coating
/ FRONT WHEEL	8"x2", PU tire
/ REAR WHEEL	24" spoke wheels, PU tire
/ ARMREST	Flip back slope armrest, PU armpad
/ FOOTREST	Swing in and away footrest, leg support
/ SEAT AND BACKREST	Flame-retardant nylon with sponge
/ FRONT FORK	Plastic
/ FOOTPLATE	Plastic
/ PACKAGE	90 pcs/ 20GP, 295 pcs/ 40HQ



ITEM NO.	SIZE	Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Overall Width Folded	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	G./N. Weight (kg)	Carton Size (cm)
TK-022	16"	105	58.5	92.5	30	40.5	42	40.5	50	120	8"	24"	17.2/15.2	83x30x85.5
	17"	105	61	92.5	30	43	42	40.5	50	120	8"	24"	17.4/15.4	83x30x85.5
	18"	105	63.5	92.5	30	45.5	42	40.5	50	120	8"	24"	17.6/15.6	83x30x85.5
	20"	105	65.5	92.5	30	50.5	42	40.5	50	120	8"	24"	18.0/16.0	83x30x85.5

TK-023

ALUMINIO

/ FRAME	Single cross brace, powder coating
/ FRONT WHEEL	8" X 1", PVC tire
/ REAR WHEEL	24" spoke wheels, PU tire
/ ARMREST	Flip back slope armrest, PU armpad
/ FOOTREST	Swing away footrest
/ SEAT AND BACKREST	Flame-retardant nylon with sponge
/ FRONT FORK	Steel
/ FOOTPLATE	Plastic
/ PACKAGE	24" rear wheel: 324 pcs/ 40GP, 346 pcs/ 40HQ 12" rear wheel: 340 pcs/ 40GP, 426 pcs/ 40HQ
/ OPTION	Rear wheel: 12" PU tire; Quick release; safety belt
/ SPECIAL	Backrest half folding; Attendant brakes



ITEM NO.	SIZE	Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Overall Width Folded	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	G./N. Weight (kg)	Carton Size (cm)
TK-023 1	18"	103	65	95	30	46	41	47	49	120	8"	24"	16.8/14.8	82x29x79

TK-024 ALUMINIO

/ FRAME	Single cross brace, powder coating
/ FRONT WHEEL	8"x1", PVC tire
/ REAR WHEEL	24" MAG wheels, PU tire+8"x1", PVC tire
/ ARMREST	Flip back with desk length, PVC armpad
/ FOOTREST	Swing away footrest, heel support
/ SEAT AND BACKREST	Flame-retardant nylon with sponge
/ FRONT FORK	Aluminum
/ FOOTPLATE	Plastic
/ PACKAGE	135 pcs/ 20GP, 288 pcs/ 40HQ
/ SPECIAL	Backrest half folding; Quick release; Additional 8" rear wheel; Anti-tipper wheels



ITEM NO.	SIZE	Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Overall Width Folded (cm)	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height (cm)	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	G./N. Weight (kg)	Carton Size (cm)
TK-024 M	18"	103	65	95	30	46	41	47	49	120	8"	24"	15.8/13.8	82x34x79

TK-025 ALUMINIO

/ FRAME	Double cross braces, powder coating
/ FRONT WHEEL	8"x1.25", PU tire
/ REAR WHEEL	24" spoke wheels, PU tire
/ ARMREST	Flip back slope armrest, PU armpad
/ FOOTREST	Swing in and away footrest
/ SEAT AND BACKREST	Flame-retardant nylon with sponge
/ FRONT FORK	Plastic
/ FOOTPLATE	Plastic
/ PACKAGE	24" rear wheel: 120 pcs/ 20GP, 270 pcs/ 40HQ 12" rear wheel: 140 pcs/ 20GP, 355 pcs/ 40HQ
/ OPTION	Rear wheel: 12", PU tires; Height adjustable armrest; Backrest half folding; Attendant brakes
/ SPECIAL	Quick release



ITEM NO.	SIZE	Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Overall Width Folded (cm)	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height (cm)	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	G./N. Weight (kg)	Carton Size (cm)
TK-025	16"	103	60	92	30	43	41	43	49	135	8"	24"	15.8/13.8	82x31x93
	18"	103	65	92	30	46	41	43	49	135	8"	24"	16.3/14.3	82x31x93

TK-026 ALUMINIO

/ FRAME	Double cross braces, powder coating
/ FRONT WHEEL	8"×1.25", PU tire
/ REAR WHEEL	12", PU tire
/ ARMREST	Flip back slope armrest, PU armpad
/ FOOTREST	Swing in and away footrest, leg support
/ SEAT AND BACKREST	Flame-retardant nylon with sponge
/ FRONT FORK	Plastic
/ FOOTPLATE	Plastic
/ PACKAGE	152 pcs/ 20GP, 360 pcs/ 40HQ
/ SPECIAL	Backrest half folding; Attendant brakes



ITEM NO.	SIZE	Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Overall Width Folded	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	G./N. Weight (kg)	Carton Size (cm)
TK-026	16"	97	58.5	92	27	43	41	43	49	125	8"	12"	16.6/16.0	74x27x86
TK-026	18"	97	63.5	92	27	46	41	43	49	125	8"	12"	17.6/14.6	74x27x86

TK-027 ALUMINIO

/ FRAME	Single cross brace, liquid painting
/ FRONT WHEEL	6"x1.25", PU tire
/ REAR WHEEL	24" spoke wheels, PU tire
/ ARMREST	Height adjustable with PU pad
/ FOOTREST	Swing in and away detachable footrest, heel support
/ SEAT AND BACKREST	Tension nylon with sponge, flame-retardant
/ FRONT FORK	Aluminum
/ FOOTPLATE	Plastic, angle adjustable
/ PACKAGE	135 pcs/ 20GP, 326 pcs/ 40HQ
/ SPECIAL	Backrest half folding; Thick cushion; Seat height adjustable; Quick release; Safety belt; Anti-tipper wheels



ITEM NO.	SIZE	Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Overall Width Folded	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	G./N. Weight (kg)	Carton Size (cm)
TK-027	14"	100	62.5	92.5	33.5	35	39.5	43.5	46	110	6"	24"	17.3/15.3	82x32x78
	15"	100	65	92.5	33.5	38	39.5	43.5	46	110	6"	24"	17.8/15.8	82x32x78
	16"	100	67.5	92.5	33.5	41	39.5	43.5	46	120	6"	24"	18.3/16.3	82x32x78
	17"	100	70	92.5	33.5	43	39.5	43.5	46	120	6"	24"	18.8/16.8	82x32x78

TK-028 ALUMINIO

/FRAME	Single cross brace, powder coating
/FRONT WHEEL	6", TPR tire
/REAR WHEEL	22" spoke wheels, pneumatic tire
/ARMREST	Fixed full length armrest, PVC armpad
/FOOTREST	Fixed footrest, leg support
/SEAT AND BACKREST	Double layers flame-retardant nylon with sponge
/FRONT FORK	Plastic
/FOOTPLATE	Plastic
/PACKAGE	115 pcs/ 20GP, 294 pcs/ 40HQ
/SPECIAL	Backrest half folding; Attendant brakes



ITEM NO.	SIZE	Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Overall Width Folded	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	G./N. Weight (kg)	Carton Size (cm)
TK-028	18"	101	63	89	26	46	40	46	48	135	6"	22"	16.3/15.3	94x27x78

TK-029 ALUMINIO

/FRAME	Double cross braces, powder coating
/FRONT WHEEL	8"x1.25", PU tire
/REAR WHEEL	24" spoke wheels, PU tire
/ARMREST	Height adjustable, forward & backward armrest with PU armpad
/FOOTREST	Swing in and away footrest
/SEAT AND BACKREST	Tension nylon with sponge, flame-retardant
/FRONT FORK	Aluminum
/FOOTPLATE	Plastic
/PACKAGE	110 pcs/ 20GP, 270 pcs/ 40HQ
/OPTION	Attendant brakes; Backrest half folding
/SPECIAL	Seat height adjustable; Quick release; Lift wheels; Anti-tipper wheels



ITEM NO.	SIZE	Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Overall Width Folded	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	G./N. Weight (kg)	Carton Size (cm)
TK-029	16"	99	67	90	34.5	41	42	45.5	46	135	8"	24"	18.5/16.0	80x32x93
	17"	99	67	90	34.5	43	42	45.5	46	135	8"	24"	19.0/16.5	80x32x93
	18"	99	67	90	34.5	46	42	45.5	46	135	8"	24"	19.5/17.0	80x32x93
	19"	99	67	90	34.5	48	42	45.5	46	135	8"	24"	20.0/17.5	80x32x93

TK-030

ALUMINIO ACERO

/FRAME	Single cross brace, powder coating
/FRONT WHEEL	8"×2", PU tire
/REAR WHEEL	24" spoke wheels, PU tire
/ARMREST	Height adjustable armrest, PU armpad
/FOOTREST	Swing in and away footrest
/SEAT AND BACKREST	Flame-retardant nylon with sponge
/FRONT FORK	Aluminum
/FOOTPLATE	Plastic
/PACKAGE	107 pcs/ 20GP, 272 pcs/ 40HQ
/SPECIAL	Seat height adjustable; Quick release



ITEM NO.	SIZE	Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Overall Width Folded	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	G./N. Weight (kg)	Carton Size (cm)
TK-030	16"	97	60.5	87	31.3	40.5	41.7	45	45	115	8"	24"	16.5/14.0	79x32x96
	18"	97	65.5	87	31.3	45.5	41.7	45	45	115	8"	24"	16.7/14.3	79x32x96
TK-030	20"	97	70.5	87	31.3	50.5	41.7	45	45	115	8"	24"	16.9/14.4	79x32x96
TK-030	16"	98	60	90	33	40.5	44	42	48	115	8"	24"	20.0/18.0	80x30x93
	18"	98	65	90	33	45.5	44	42	48	115	8"	24"	20.0/18.0	80x30x93

TK-031

ALUMINIO

/FRAME	Double cross braces, liquid painting
/FRONT WHEEL	8"×1.25", PU tire
/REAR WHEEL	24" spoke wheels, PU tire
/ARMREST	Height adjustable, forward & backward armrest with PU armpad
/FOOTREST	Swing in and away footrest, heel support
/SEAT AND BACKREST	Tension nylon with sponge, flame-retardant
/FRONT FORK	Aluminum, angle adjustable
/FOOTPLATE	Plastic, angle adjustable
/PACKAGE	110 pcs/ 20GP, 256 pcs/ 40HQ
/SPECIAL	Attendant drum brakes; Seat height adjustable; Quick release; Lift wheels; Anti-tipper wheels



ITEM NO.	SIZE	Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Overall Width Folded	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	G./N. Weight (kg)	Carton Size (cm)
TK-031	15"	109	58.5	92.5-100	33	38	43	40	49-54	110	8"	24"	15.5/13.5	81×32×97.5
	16"	109	60.5	92.5-100	33	40	43	40	49-54	110	8"	24"	15.6/13.6	81×32×97.5
	17"	109	63.5	92.5-100	33	43	43	40	49-54	110	8"	24"	15.8/13.8	81×32×97.5
	18"	109	65.5	92.5-100	33	45	43	40	49-54	120	8"	24"	16.0/14.0	81×32×97.5
	19"	109	68.5	92.5-100	33	48	43	40	49-54	120	8"	24"	16.2/14.2	81×32×97.5
	20"	109	71.5	92.5-100	33	51	43	40	49-54	120	8"	24"	16.5/14.5	81×32×97.5

TK-032 ALUMINIO

/ FRAME	Triple cross braces, powder coating
/ FRONT WHEEL	8"x1.25", PU tire
/ REAR WHEEL	24" spoke wheels, PU tire
/ ARMREST	Height adjustable armrest
/ FOOTREST	Swing away footrest, heel support
/ SEAT AND BACKREST	Flame-retardant nylon with sponge
/ FRONT FORK	Aluminum
/ FOOTPLATE	Plastic, angle adjustable
/ PACKAGE	147 pcs/ 20GP, 334 pcs/ 40HQ
/ OPTION	Backrest angle adjustable; Height adjustable armrest
/ SPECIAL	Seat depth adjustable; Back tube height adjustable; Seat height adjustable; Quick release; Anti-tipper wheels



ITEM NO.	SIZE	Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Overall Width Folded	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	G./N. Weight (kg)	Carton Size (cm)
TK-032	15"	101	59	92	32	38	41-51	48.5	50	115	8"	24"	16.8/14.8	84x29x78
	16"	101	61.5	92	32	41	41-51	48.5	50	115	8"	24"	17.3/15.3	84x29x78
	17"	101	63	92	32	43	41-51	48.5	50	115	8"	24"	17.8/15.8	84x29x78
	18"	101	65.5	92	32	46	41-51	48.5	50	115	8"	24"	18.3/16.3	84x29x78
	19"	101	68	92	32	48	41-51	48.5	50	115	8"	24"	18.8/16.8	84x29x78
	20"	101	70.5	92	32	51	41-51	48.5	50	115	8"	24"	19.3/17.3	84x29x83

TK-033 ALUMINIO

/ FRAME	Single cross brace, powder coating
/ FRONT WHEEL	8"x1.25", PU tire
/ REAR WHEEL	24" rear self-propelled wheel (Quick release) 12" rear transit wheel
/ ARMREST	Height adjustable slope armrest
/ FOOTREST	Swing away footrest with heel support
/ SEAT AND BACKREST	Nylon with sponge, Flame retardant
/ FRONT FORK	Plastic
/ FOOTPLATE	Nylon
/ PACKAGE	135 pcs/ 20GP, 326 pcs/ 40HQ
/ SPECIAL	Backrest half folding; Rear wheel quick release (for 24" rear wheel); Armrest height adjustable; Seat height adjustable



ITEM NO.	SIZE	Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Overall Width Folded	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	G./N. Weight (kg)	Carton Size (cm)
TK-033	14"	100	62.5	92.5	33.5	35	39.5	43.5	46	110	8"	24"	17.3/15.3	82x32x78
	15"	100	65	92.5	33.5	38	39.5	43.5	46	110	8"	24"	17.8/15.8	82x32x78
	16"	100	67.5	92.5	33.5	41	39.5	43.5	46	135	8"	24"	18.3/16.3	82x32x78
TK-033	17"	100	70	92.5	33.5	43	39.5	43.5	46	135	8"	24"	18.8/16.8	82x32x78
	18"	100	72	92.5	33.5	45	39.5	43.5	46	135	8"	24"	18.8/16.8	82x32x78

TK-034 ALUMINIO

/ FRAME	Single cross brace, powder coating
/ FRONT WHEEL	8"x1", PVC tire
/ REAR WHEEL	12", PU tire
/ ARMREST	Fixed full length armrest, PVC armpad
/ FOOTREST	Swing away footrest, heel support
/ SEAT AND BACKREST	Flame-retardant nylon with sponge
/ FRONT FORK	Aluminum
/ FOOTPLATE	Plastic
/ PACKAGE	197 pcs/ 20GP, 442 pcs/ 40HQ
/ SPECIAL	Backrest half folding; Attendant brakes; Safety belt



ITEM NO.	SIZE	Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Overall Width Folded	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	G./N. Weight (kg)	Carton Size (cm)
TK-034	19"	100	58	91	27	48	40	46	48	115	8"	12"	14.5/13.0	71x27x78

TK-035 ALUMINIO

/ FRAME	Single cross brace, liquid painting
/ FRONT WHEEL	8"x1", PVC tire
/ REAR WHEEL	12", PU tires
/ ARMREST	Flip back slope armrest, PVC armpad
/ FOOTREST	Swing away footrest
/ SEAT AND BACKREST	Nylon with sponge
/ FRONT FORK	Steel
/ FOOTPLATE	Plastic
/ PACKAGE	113 pcs/ 20GP, 287 pcs/ 40HQ
/ SPECIAL	Attendant brakes; Backrest half folding



ITEM NO.	SIZE	Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Overall Width Folded	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	G./N. Weight (kg)	Carton Size (cm)
TK-035	17"	103	64.5	102	27	43	43	48	50	115	8"	12"	13.8/11.8	80×29×86
	19"	103	64.5	102	27	48	43	48	50	115	8"	12"	14.8/12.8	80×29×86

TK-036

ALUMINIO ACERO

/ FRAME	Single cross brace, powder coating
/ FRONT WHEEL	6" × 1", PVC tire/ 6" PU tire
/ REAR WHEEL	8" × 1", PVC tire/ 8" × 1.25", PU tire
/ ARMREST	Fixed slope armrest, PVC armpad
/ FOOTREST	Swing away footrest
/ SEAT AND BACKREST	Flame-retardant nylon with sponge
/ FRONT FORK	Plastic
/ FOOTPLATE	Plastic
/ PACKAGE	225 pcs/ 20GP, 560 pcs/ 40HQ
/ OPTION	Attendant brakes
/ SPECIAL	Backrest half folding; Safety belt; Hand strap



ITEM NO.	SIZE	Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Overall Width Folded	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	G./N. Weight (kg)	Carton Size (cm)
TK-036	18"	108	61	93.5	21	46	40	44	48	115	6"	8"	14.6/11.1	61x24x76

TK-037

ALUMINIO

/ FRAME	Double cross braces, powder coating
/ FRONT WHEEL	6"x1.25", PU tire
/ REAR WHEEL	22" spoke wheels, PU tire
/ ARMREST	Fixed full length armrest, PU armpad
/ FOOTREST	Fixed footrest, leg support
/ SEAT AND BACKREST	Flame-retardant nylon with sponge
/ FRONT FORK	Plastic
/ FOOTPLATE	Plastic
/ PACKAGE	100 pcs/ 20GP, 250 pcs/ 40HQ
/ SPECIAL	Backrest half folding



ITEM NO.	SIZE	Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Overall Width Folded	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	G./N. Weight (kg)	Carton Size (cm)
TK-037 L	16"	99.5	64.5	90	31	40	41	43	47.5	100	6"	22"	15.0/13.0	98×32×86

TK-038 ALUMINIO

/ FRAME	Single cross brace, powder coating
/ FRONT WHEEL	6"x1.25", PU tire
/ REAR WHEEL	24" spoke wheels, pneumatic tire
/ ARMREST	Detachable armrest
/ FOOTREST	Swing away footrest
/ SEAT AND BACKREST	Tension nylon with sponge, flame-retardant
/ FRONT FORK	Aluminum
/ FOOTPLATE	Plastic, angle adjustable
/ PACKAGE	132 pcs/ 20GP, 319 pcs/ 40HQ
/ SPECIAL	Back tube height adjustable; Seat height adjustable; Quick release; Seat depth adjustable



ITEM NO.	SIZE	Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Overall Width Folded	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	G./N. Weight (kg)	Carton Size (cm)
TK-038	15"	93	55.5	81-97	30	38	42	36-37	46-52	115	6"	24"	14.5/12.5	77x30x88
	16"	93	58	81-97	30	41	42	36-37	46-52	115	6"	24"	15.0/13.0	77x30x88
TK-038	17"	93	60.5	81-97	30	43	42	36-37	46-52	115	6"	24"	15.5/13.5	77x30x88
	18"	93	63	81-97	30	46	42	36-37	46-52	115	6"	24"	16.0/14.0	77x30x88

TK-039 ALUMINIO

/ FRAME	United frame, liquid painting
/ FRONT WHEEL	5" PU tire
/ REAR WHEEL	24" spoke wheels, pneumatic tire
/ SIDE PLATE	ABS
/ FOOTREST	Fixed united footrest, height adjustable
/ SEAT AND BACKREST	Tension nylon with sponge, flame-retardant
/ FRONT FORK	Aluminum
/ FOOTPLATE	Aluminum, height and angle adjustable
/ PACKAGE	80 pcs/ 20GP, 210 pcs/ 40HQ
/ OPTION	With/without armrest; Aluminum side plate; 4" front castor; Thick cushion
/ SPECIAL	Backrest angle adjustable; Gravity adjustable; Seat height adjustable; Side plate height adjustable; Anti-tipper wheels



ITEM NO.	SIZE	Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Overall Width Folded	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	G./N. Weight (kg)	Carton Size (cm)
TK-039	16"	83.5	63	80	/	40.5	41	32.5	48	110	4"/5"	24"	14.0/12.0	74x63x63
	18"	83.5	63	80	/	46	41	32.5	48	110	4"/5"	24"	14.0/12.0	74x63x63

TK-040

ALUMINIO

/ FRAME	Single cross brace, powder coating
/ FRONT WHEEL	6"x2", PU tire
/ REAR WHEEL	20" spoke wheels, pneumatic tire
/ ARMREST	Flip back with desk length, PU armpad
/ FOOTREST	Swing away footrest, leg support
/ SEAT AND BACKREST	Double layers flame-retardant nylon with sponge, 3cm cushion
/ FRONT FORK	Aluminum
/ FOOTPLATE	Plastic
/ PACKAGE	160 pcs/ 20GP, 384 pcs/ 40HQ
/ SPECIAL	Anti-tipper wheels; Safety belt



ITEM NO.	SIZE	Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Overall Width Folded	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	G./N. Weight (kg)	Carton Size (cm)
TK-040	12"	93	48	84	27.5	31	31	38	46	60	6"	20"	18.5/16.0	72x28x86
TK-040	14"	93	53	84	27.5	35.5	31	38	46	80	6"	20"	19.5/17.0	72x28x86

TK-041

ALUMINIO

/ FRAME	Single cross brace, powder coating
/ FRONT WHEEL	6"x1.25", PU tire
/ REAR WHEEL	22" MAG wheels, PU tire
/ ARMREST	Flip back full length armrest, PU armpad
/ FOOTREST	Swing in and away footrest
/ SEAT AND BACKREST	Flame-retardant nylon with sponge
/ FRONT FORK	Aluminum
/ FOOTPLATE	Plastic
/ PACKAGE	120 pcs/ 20GP, 320 pcs/ 40HQ



ITEM NO.	SIZE	Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Overall Width Folded	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	G./N. Weight (kg)	Carton Size (cm)
TK-041 K	14"	103	52	92	30	35	41	43	49	100	6"	22"	13.5/11.5	77x31x88

Sillas de ruedas eléctricas

Recuperar el control del propio recorrido.

LA NECESIDAD

Alguien con fuerza limitada en brazos quiere decidir por sí mismo hacia dónde va.

LA RESPUESTA TAKUMI™

Sillas con motor, mando de control, batería y frenos electromagnéticos; versiones plegables y de estructura reforzada.

LA DIFICULTAD

Empujar deja de ser una opción y la asistencia constante reduce la iniciativa.

LA EVIDENCIA

Cada ficha declara potencia del motor, tipo y capacidad de batería, autonomía, velocidad y capacidad de carga.

Defina entorno de uso y autonomía requerida para seleccionar el modelo.

CATEGORÍA 02 DE 12

TK-042

FIBRA DE CARBONO

/ TYPE	Electric Wheelchair
/ CONTROLLER	PG Brushless controller
/ MOTOR	200W, electromagnetic brake
/ MAX SPEED	6 km/h
/ TRAVEL MILEAGE	15 km
/ BATTERY	24V 12Ah Li-ion
/ ANGLE SEAT SURFACE	4°
/ BACKREST ANGLE	10°
/ TOTAL MASS(BATTERY INCLUDED)	13.5 kg
/ WEIGHT OF BATTERY	2 kg
/ MAXIMUM SAFE SLOPE	6°
/ MINIMUM TURNING RADIUS	1100 mm
/ MINIMUM WIDTH REQUIRED TO REVERSE	1100 mm
/ MAXIMUM HEIGHT OF OBSTACLE	40 mm
/ PACKAGE	253 pcs/40HQ




Product features



Carbon fiber body, ultra-light weight



Folds compactly for easy carrying and storage

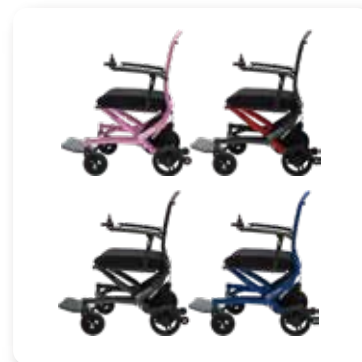

Available in multiple colors

ITEM NO.		Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Height Footplate (cm)	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	Total Mass (inc./ex. bat.) (kg)	Carton Size (cm)
TK-042		93	58	97	15	44.5	46.5	50	49.5	136	7"	8.5"	13.5/11.5	95x60x70


TK-043 ACERO

NEW

/ TYPE	Electric Wheelchair
/ CONTROLLER	Dynamic(drive only/drive+light+actuator)
/ MOTOR	2x340W, electromagnetic brake
/ MAX SPEED	10 km/h
/ TRAVEL MILEAGE	30 km
/ BATTERY	Lead-acid batteries 24V 52Ah
/ FRONT WHEEL	9"x3"
/ REAR WHEEL	14"x3"
/ TOTAL MASS(BATTERY INCLUDED)	106.5 kg
/ WEIGHT OF BATTERY	30 kg
/ MAXIMUM SAFE SLOPE	10°
/ MINIMUM TURNING RADIUS	900 mm
/ MIN. BRAKING DISTANCE AT MAX. SPEED	1700 mm
/ MAXIMUM HEIGHT OF OBSTACLE	50 mm
/ SUSPENSION	Rear Suspension



Product features

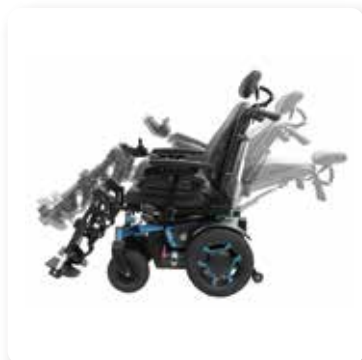

Multi-angle adjustment



Rear lights



Dynamic/PG controller

ITEM NO.		Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Height Footplate (cm)	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	Total Mass (inc./ex. bat.) (kg)	Carton Size (cm)
TK-043		108	58	121.5	13~20	43~48	43~48	*	75	136	9"	14"	106.5/76.5	102x72.5x85

TK-044 ALUMINIO

/FRAME	Aluminum, powder coating
/CONTROLLER	PG/China
/MOTOR	180W×2, brush motor
/MAX SPEED	7 km/h
/TRAVEL MILEAGE	15 km
/BATTERY	Lithium battery 24V 20Ah, 30Ah optional
/FRONT WHEEL	8"×2", PU tire
/REAR WHEEL	12" pneumatic/PU, aluminum alloy
/ARMREST	Flip back armrest, PU armpad
/FOOTREST	Flip up, with aluminum pad
/SEAT	Breathable backrest, thick cushion
/PACKAGE	95 pcs/20GP, 240 pcs/40HQ
/SPECIAL	Max. 30Ah lithium battery; Electromagnetic brake; Safety belt; Backrest height adjustable; Tool-free detachable battery box



ITEM NO.		Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Overall Width Folded (cm)	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height (cm)	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	G./N. Weight (kg)	Carton Size (cm)
TK-044		105	67	94	39	45	42	43	51	135	8"	12"	50.5/46	72×43×88

TK-045 ACERO ALUMINIO

/FRAME	Steel/Aluminum, powder coating
/CONTROLLER	PG/China
/MOTOR	200W×2, brush motor
/MAX SPEED	7 km/ h
/TRAVEL MILEAGE	20 km
/BATTERY	Lead acid 2x12V 20Ah, 32Ah/36Ah optional
/FRONT WHEEL	8"×2", PU tire
/REAR WHEEL	12.5" pneumatic/PU, aluminum alloy
/ARMREST	Flip back slope armrest, PU armpad, height adjustable optional
/FOOTREST	Detachable footrest with heel support
/SEAT	Tension nylon with sponge, thick cushion
/PACKAGE	75 pcs/ 20GP, 185 pcs/ 40HQ
/SPECIAL	Backrest half folding; Safety belt; Electromagnetic brake



ITEM NO.		Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Overall Width Folded (cm)	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height (cm)	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	G./N. Weight (kg)	Carton Size (cm)
TK-045	Steel	108	63	97	34	43-48	43	45	52	135	8"	12.5"	65.6/61.6	87×38×81
TK-045	Aluminum	108	63	97	34	43-48	43	45	52	135	8"	12.5"	58.0/50.3	87×38×81

TK-046

ALUMINIO

/ FRAME	Aluminum, powder coating, foldable
/ CONTROLLER	PG/China
/ MOTOR	340W×2, brush motor
/ MAX SPEED	8-9 km/h
/ TRAVEL MILEAGE	20 km
/ BATTERY	Lead acid 2×12V 32Ah
/ FRONT WHEEL	9" PU tire
/ REAR WHEEL	14" solid tire
/ ARMREST	Height adjustable armrest, PU armpad
/ FOOTREST	Detachable footrest with heel support
/ SEAT	Tension nylon with sponge, thick cushion
/ PACKAGE	75 pcs/20GP, 190 pcs/40HQ
/ SPECIAL	Headrest; Elevating legrest; Anti-tipper wheels; Safety belt; Reclining backrest(max. 130°); Footplate height and angle adjustable; Armrest height adjustable(150-170 mm); Seat depth and width adjustable; Anti-tipper wheels



ITEM NO.		Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Overall Width Folded	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	G./N. Weight (kg)	Carton Size (cm)
TK-046		107	65	97	36	44-50	47.5-50	44	53	135	9"	14"	71.7/66.7	87×45×83

TK-047

ALUMINIO

/ FRAME	Aluminum, powder coating
/ CONTROLLER	China
/ MOTOR	150W×2, brushless motor
/ MAX SPEED	6 KM/H
/ TRAVEL MILEAGE	15 KM
/ BATTERY	Lithium battery, 12Ah
/ FRONT WHEEL	8"×2", PU tire
/ REAR WHEEL	12" pneumatic/PU, aluminum alloy
/ ARMREST	Height adjustable armrest, PU armpad
/ FOOTREST	Detachable with angle adjustable footplate
/ SEAT	Tension nylon backrest
/ PACKAGE	Breathable cushion seat
/ SPECIAL	Safety belt; Backrest half folding



ITEM NO.		Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Overall Width Folded	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	G./N. Weight (kg)	Carton Size (cm)
TK-047		100	63	95	49	38.5	41	48	50	120	8"	12"	29.4/24.9	85x45x84
TK-047		100	65	95	41	45	41	48	50	120	8"	12"	29.4/24.9	85x45x84

TK-048 ACERO

/ FRAME	Steel, powder coating
/ CONTROLLER	China
/ MOTOR	250W × 2, brush motor
/ MAX SPEED	7 km/h
/ TRAVEL MILEAGE	15 km
/ BATTERY	Lead acid 2x12V 12Ah, 20Ah optional
/ FRONT WHEEL	8" × 2", PU tire
/ REAR WHEEL	16" pneumatic, steel alloy
/ ARMREST	Flip back slope armrest, PVC armpad
/ FOOTREST	Detachable footrest with heel support
/ SEAT	Tension nylon with sponge, breathable cushion
/ PACKAGE	80 pcs/20GP, 210 pcs/40HQ
/ SPECIAL	Safety belt; Hand brakes



ITEM NO.		Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Overall Width Folded (cm)	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height (cm)	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	G./N. Weight (kg)	Carton Size (cm)
TK-048		106	64	94	37	43-48	44	41	53	135	8"	16"	51.0/43.0	87x38x99

TK-049 ALUMINIO

/ FRAME	Aluminum, powder coating
/ CONTROLLER	PG/China
/ MOTOR	340W × 2, brush motor
/ MAX SPEED	9 KM/H
/ TRAVEL MILEAGE	20 KM
/ BATTERY	Lead acid 2x12V 32Ah, 20Ah /36Ah optional
/ FRONT WHEEL	9" PU tire, 10" optional
/ REAR WHEEL	14" pneumatic/solid, aluminum alloy
/ ARMREST	Flip back height adjustable slope armrest, PU armpad
/ FOOTREST	Detachable footrest with heel support
/ SEAT	Tension nylon with sponge, thick cushion
/ PACKAGE	75 pcs/20GP, 160 pcs/40HQ
/ SPECIAL	Phone holder; Cup holder; Safety belt; Electromagnetic brake;



ITEM NO.		Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Overall Width Folded (cm)	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height (cm)	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	G./N. Weight (kg)	Carton Size (cm)
TK-049		107	65	97	36	43-48	44	44	53	135	9"	14"	81.0/62.0	89x42x104

TK-050

ALUMINIO

/ FRAME	Aluminum, powder coating
/ CONTROLLER	PG/ China
/ MOTOR	200W×2, brush motor
/ MAX SPEED	7 km/h
/ TRAVEL MILEAGE	15 km
/ BATTERY	Lithium 24V 20Ah (Lead acid 20Ah battery optional)
/ FRONT WHEEL	8"×2", PU tire
/ REAR WHEEL	12.5" pneumatic/PU, aluminum alloy
/ ARMREST	Flip back slope armrest, PU armpad
/ FOOTREST	Detachable footrest with heel support
/ SEAT	Breathable backrest and cushion
/ PACKAGE	95 pcs/20GP, 245 pcs/40HQ
/ OPTION	Height adjustable armrest; Color upholstery
/ SPECIAL	Backrest half folding; Safety belt; Electromagnetic brake



ITEM NO.		Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Overall Width Folded	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	G./N. Weight (kg)	Carton Size (cm)
TK-050		108	63	97	34	45	44	44	53	135	8"	12.5"	40.5/33.5	87x38x81

TK-051

ACERO

/ FRAME	Steel, powder coating
/ CONTROLLER	PG/China
/ MOTOR	250W×2, brush motor
/ MAX SPEED	7 KM/H
/ TRAVEL MILEAGE	15 KM
/ BATTERY	Lead acid 2×12V, 20Ah
/ FRONT WHEEL	8"×2", PU tire
/ REAR WHEEL	12.5" pneumatic/PU, steel spoke
/ ARMREST	Flip back slope armrest, PU armpad
/ FOOTREST	Detachable footrest with heel support
/ SEAT	Tension nylon with sponge, thick cushion
/ SPECIAL	Electromagnetic brake; Safety belt; Backrest half folding



ITEM NO.		Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Overall Width Folded	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	G./N. Weight (kg)	Carton Size (cm)
TK-051	15"	108	63	97	46	38	44	44	53	135	8"	12.5"	37.0/35.0	87x48x81
	18"	108	63	97	46	45	44	44	53	135	8"	12.5"	37.0/35.0	87x48x81
	20"	108	63	97	46	50	44	44	53	135	8"	12.5"	37.0/35.0	87x48x81

TK-052 ACERO

/ FRAME	Steel, powder coating
/ CONTROLLER	PG/Dynamic
/ MOTOR	340W × 2, brush motor
/ MAX SPEED	9 km/h
/ TRAVEL MILEAGE	25 km
/ BATTERY	Lead acid, 24V 50Ah (36Ah optional)
/ FRONT WHEEL	9", pneumatic/ PU tire
/ REAR WHEEL	14", pneumatic tire, aluminum alloy
/ ARMREST	Height adjustable armrest, wide PU armpad
/ FOOTREST	Detachable footrest with heel support, width adjustable
/ SEAT	Tension nylon backrest, thick cushion
/ PACKAGE	30 pcs/20GP, 66 pcs/40GP
/ SPECIAL	Powered seat tilting and back reclining; Headrest; Electromagnetic brake; Light system; Seat width adjustable; Seat depth adjustable



ITEM NO.		Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Overall Width Folded	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	G./N. Weight (kg)	Carton Size (cm)
TK-052		114.3	62.5	99.5	/	43-50	33-50	49.5	50	135	9"	14"	110.0/98.0	102x77x97

TK-053 ACERO

/ FRAME	Steel, powder coating
/ CONTROLLER	PG/China
/ MOTOR	240W × 2, brush motor
/ MAX SPEED	6 KM/H
/ TRAVEL MILEAGE	15 KM
/ BATTERY	Lead acid 2 × 12V 12Ah, lithium battery 20Ah optional
/ FRONT WHEEL	6", black PU tire
/ REAR WHEEL	8", black PU tire
/ ARMREST	Flip back armrest, PU armpad
/ FOOTREST	Flip up aluminum footrest, height adjustable
/ BACKREST	Soft PU leather, long-lasting, easy cleaning
/ SEAT	PU leather, forward and backward adjustable
/ PACKAGE	75 pcs/20GP, 190 pcs/40HQ
/ SPECIAL	Seat width adjustable; Detachable into 3 pieces



ITEM NO.		Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Overall Width Folded	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	G./N. Weight (kg)	Carton Size (cm)
TK-053		90	53	93	/	46	34	40	53	120	6"	8"	52.5/46.5	82x62x62



03

DIVISIÓN 01 · MOVILIDAD Y REHABILITACIÓN

Scooters de movilidad

Distancias que vuelven a ser posibles.

LA NECESIDAD

Una persona mayor quiere hacer sus recados y volver sin agotarse.

LA RESPUESTA TAKUMI™

Scooters de tres y cuatro ruedas, con manillar, cesta, asiento giratorio y versiones plegables o desmontables.

LA DIFICULTAD

La distancia se convierte en la barrera antes que la propia movilidad.

LA EVIDENCIA

Cada modelo declara autonomía, velocidad máxima, capacidad de carga, tipo de batería y medidas de transporte.

Compare autonomía y radio de giro según el trayecto habitual.

CATEGORÍA 03 DE 12

TK-054

FIBRA DE CARBONO

NEW

/ CONTROLLER	Brushless controller
/ MOTOR	200W, electromagnetic brake
/ MAX. SAFE SLOPE	6°
/ MAX SPEED	6 km/h
/ TRAVEL MILEAGE	14.5 km
/ BATTERY	24V 10/12/14Ah Li-ion
/ WHEEL	Front: 7"; Rear:8"
/ CHARGER	24V 2A
/ SEAT	Removable seat cushion
/ COLOR	White/Blue/Red (more colors can be customized)
/ PACKAGE	290 pcs/40GP
/ POSITION LIGHT	Front / Rear



Delta tiller with dashboard



Anti-tipper wheel + transport wheel



Height-adjustable tiller



Fold-back armrest



NFC unlock & LCD display



Folds compactly for easy carrying and storage

ITEM NO.		Total Width (cm)	Total Height (cm)	Total Length (cm)	Seat Height (cm)	Seat Width (cm)	Seat Depth (cm)	Total Mass (inc./ex. bat.) (kg)	Weight Capacity (kg)	Carton Size (cm)
TK-054		52	92.5	101.5	53.6	40	38	16.3/14.8	136	60x58x80

TK-055

ACERO

NEW

/ CONTROLLER	160 A
/ MOTOR	450W / 600 W, electromagnetic brake
/ SLOPE	10°
/ MAX SPEED	15 km/h
/ TRAVEL MILEAGE	50 km
/ BATTERY	Lead acid 24V 75Ah
/ WHEEL	13" pneumatic tires with aluminum alloy hub
/ CHARGER	24V 10A
/ SEAT	PVC with sponge
/ Maximum height of obstacle	50 mm
/ SUSPENSION	Front / Rear



Adjustable handlebars, seat, backrest, headrest and armrests



2 cup holders



13" pneumatic tires with aluminum alloy hubs



Delta tiller with dashboard



Front and rear shock absorbers



Detachable and foldable

ITEM NO.		Total Width (cm)	Total Height (cm)	Total Length (cm)	Seat Height (cm)	Seat Width (cm)	Seat Depth (cm)	Total Mass (inc./ex. bat.) (kg)	Weight Capacity (kg)	Carton Size (cm)
TK-055		62.5	133	136.5	48.5 - 53.5	47	43	135/100	150	168x85x81

TK-056

TK-057

VERSIÓN DESMONTABLE

/ CONTROLLER	Dynamic 50A
/ MOTOR	270W, electromagnetic brake
/ SLOPE	6°
/ MAX SPEED	8 km/h
/ TRAVEL MILEAGE	16 km
/ BATTERY	Lead acid 24V 12Ah
/ WHEEL	8" × 2.5", black PU tire
/ CHARGER	24V 2A
/ SEAT	PVC with sponge
/ COLOR	Champagne/ Red/ Blue
/ PACKAGE	227 pcs/40HQ
/ SUSPENSION	Virgo-D: / ; Virgo-F:Rear



Delta tiller with dashboard



360° rotatable ergonomic seat



Equipped with storage basket



Rearview mirror optional



TK-056: easily disassembled into five pieces



TK-057: easily disassembled into four pieces

ITEM NO.		Total Width (cm)	Total Height (cm)	Total Length (cm)	Seat Height (cm)	Seat Width (cm)	Seat Depth (cm)	G./N. Weight (kg)	Weight Capacity (kg)	Carton Size (cm)
TK-056	F	50	85.5-89	103	49.5-53	44	39	49.0/45.0	136	113x50.5x53

TK-058 TK-059

/ CONTROLLER	Dynamic 50A
/ MOTOR	270W, electromagnetic brake
/ SLOPE	6°
/ MAX SPEED	8 km/h
/ TRAVEL MILEAGE	16 km(Libra-D); 25 km(Libra-DX);
/ BATTERY	Lead acid 24V 15Ah(Libra-D)/25Ah(Libra-DX)
/ WHEEL	8"×2.5", black PU tire
/ CHARGER	24V 2A
/ SEAT	PVC with sponge
/ COLOR	Champagne/ Red/ Blue
/ PACKAGE	227 pcs/40HQ
/ SUSPENSION	Libra-D: / ; Libra-DX:Front and Rear



Delta tiller with dashboard



360° rotatable ergonomic seat



Easily disassembled into five pieces



Equipped with storage basket



Rearview mirror optional



Position light

ITEM NO.		Total Width (cm)	Total Height (cm)	Total Length (cm)	Seat Height (cm)	Seat Width (cm)	Seat Depth (cm)	G./N. Weight (kg)	Weight Capacity (kg)	Carton Size (cm)
TK-058	D	48.5	88	108.3	51-54.5	43.5	38	39.5/35.5	136	113x50.5x53
TK-059	DX	48.5	88	108.3	53.5-57	44	41	57.1/52.9	136	113x50.5x53

TK-060

/ CONTROLLER	Dynamic DR90
/ MOTOR	320W, electromagnetic brake
/ SLOPE	9°
/ MAX SPEED	10 km/h
/ TRAVEL MILEAGE	38 km/ 50km
/ BATTERY	24V 38Ah/ 24V 52Ah
/ WHEEL	10", air tyre
/ CHARGER	24V 4A/ 24V 6A
/ SEAT	PVC Leather with sponge
/ PACKAGE	36 pcs/20GP, 78 pcs/40GP



Intuitive control panel



Comfort adjustable seating



Easily disassembled into five pieces



Equipped with storage basket



Brake light/indicators



Headlight

ITEM NO.		Total Width (cm)	Total Height (cm)	Total Length (cm)	Seat Height (cm)	Seat Width (cm)	Seat Depth (cm)	G./N. Weight (kg)	Weight Capacity (kg)	Carton Size (cm)
TK-060	38Ah	58.3	96.5	125.5	50-54	45	45.5	94.6/89.6	150	Body: 133x63x63 Seat: 60x55x39
	52Ah	58.3	96.5	125.5	50-54	45	45.5	98.6/93.6	150	

Coches posturales infantiles

Crece participando.

LA NECESIDAD

Una familia quiere llevar a su hijo al parque, a la escuela y a la consulta.

LA RESPUESTA TAKUMI™

Coches posturales con soporte de tronco y cabeza, arneses, capota, respaldo reclinable y plegado compacto.

LA DIFICULTAD

El equipo de adulto no sostiene un cuerpo en crecimiento ni entra en el coche familiar.

LA EVIDENCIA

Cada modelo declara medidas de asiento, capacidad de carga, peso y dimensiones plegado.

Solicite la configuración postural adecuada a la edad y talla del usuario.

CATEGORÍA 04 DE 12

TK-061

ALUMINIO

/ FRAME	Light weight and luxury design
/ FRONT WHEEL	8"x2", PU tire
/ REAR WHEEL	12", PU tire
/ PUSHBAR	Height adjustable
/ FOOTREST	Adjustable angle and height footrest
/ SEAT AND BACKREST	Changeable seat width and depth; Comfortable soft and adjustable headrest
/ FRONT FORK	Plastic
/ SEAT SYSTEM	Removable, two-way adjustable and reclining
/ PACKAGE	121 pcs/ 20GP, 230 pcs/ 40HQ
/ SPECIAL	Foldable chair frame for easy transportation and storage; Mesh bag for small belongings; Seat fixed, 6 angle degree



ITEM NO.	SIZE	Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Overall Width Folded	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	G./N. Weight (kg)	Carton Size (cm)
TK-061		83	64	116	/	28-32	30	/	51.5	60	8"	12"	22.4/19.6	82x66x45
		83	64	116	/	32-40	30	/	51.5	60	8"	12"	22.4/19.6	82x74x45

TK-062

ALUMINIO

/ FRAME	Single cross brace, powder coating
/ FRONT WHEEL	6", PU tire
/ REAR WHEEL	16", PU tire
/ ARMREST	Height adjustable armrest, PU armpad
/ FOOTREST	Elevating legrest
/ SEAT AND BACKREST	Breathable mesh fabric
/ FRONT FORK	Aluminum
/ FOOTPLATE	Plastic
/ PACKAGE	100 pcs/ 20GP, 200 pcs/ 40HQ
/ OPTION	Attendant brakes; Tray table
/ SPECIAL	Backrest reclining; Seat tilting



ITEM NO.	SIZE	Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Overall Width Folded	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	G./N. Weight (kg)	Carton Size (cm)
TK-062	14"	98	48	100	33	36	38	46	42	≤90	6"	16"	26.0/24.0	80×40×64
	16"	98	53	100	33	40	38	46	42	≤90	6"	16"	27.0/25.0	80×40×68
	18"	112	60	110	33	46	40	54	45	≤90	6"	16"	30.0/27.0	95×34×95

Grúas de traslado

Mover a una persona sin poner en riesgo a nadie.

LA NECESIDAD

El equipo de cuidado debe trasladar a un paciente varias veces al día.

LA RESPUESTA TAKUMI™

Grúas eléctricas y de bipedestación, con arnés, mástil regulable, base con ruedas y freno, y actuador eléctrico.

LA DIFICULTAD

El traslado manual es la principal causa de lesión lumbar del personal.

LA EVIDENCIA

Cada modelo declara capacidad de elevación, rango de altura, dimensiones de base y tipo de batería.

Defina el peso máximo del usuario y el espacio disponible en la habitación.

CATEGORÍA 05 DE 12

TK-063 ACERO

/ FRAME	Steel, powder coating
/ CHASSIS LENGTH	1070 mm
/ CHASSIS WIDTH	600 mm - 800 mm
/ LIFTING HEIGHT	830 mm - 1850 mm
/ HANDLE HEIGHT	1000 mm
/ CASTOR HEIGHT	90 mm
/ MOTOR	DC 24V 8000N
/ BATTERY	DC 24V 5Ah, rechargeable battery Approx. 60 lifts per full charge
/ CHARGER	24V-1A
/ CHARGING TIME	6 hours per time
/ FRONT CASTOR	3" solid tire, plastic wheel optional
/ REAR CASTOR	4" solid tire with locking, plastic wheel optional
/ MAX. USER WEIGHT	150 kg (23.62 stone)
/ ALTERNATIVES	Purpose designed sling
/ PACKAGE	1260 × 630 × 350 mm
/ G./N.W.	51 / 43 kg



TK-064 STANDING



TK-065 FOLDED HOME-USE



TK-066 MANUAL

ITEM NO.	Chassis Length (mm)	Chassis Width (mm)	Lifting Height (mm)	Handle Height (mm)	Castor Height (mm)	Motor	Charger	Front Caster Spec.	Rear Caster Spec.	Max.User Weight (kg)	G./N. Weight (kg)	Carton Size (mm)
TK-064	1070	600-800	1295-1960	1000	90	DC 24V 8000N	24V-1A	3"	4"	150	56.5/48.5	1240x630x350
TK-065	940	535-840	770-1830	1080	90	DC 24V 8000N	24V-1A	3"	4"	150	47.0/39.5	1260x570x350
TK-066	1160	600-800	910-1900	1000	90	DC 24V 8000N	24V-1A	3"	4"	150	51.0/43.0	1240x630x350

TK-067 ACERO

/ FRAME	Steel, powder coating
/ CHASSIS LENGTH	1200 mm
/ CHASSIS WIDTH	600 mm - 1065 mm
/ LIFTING HEIGHT	840 mm - 1870 mm
/ HANDLE HEIGHT	1170 mm
/ CASTOR HEIGHT	115 mm
/ MOTOR	DC 24V 8000N
/ BATTERY	DC 24V 2.2AH, interchangeable feeding battery Approx. 60 lifts per full charge
/ CHARGER	24V-1A
/ CHARGING TIME	5 hours per time
/ FRONT CASTOR	3" solid tires
/ REAR CASTOR	4" solid tires with locking
/ PUSH HANDLE	Push handle with rounded corners
/ MAX. USER WEIGHT	150 kg (23.62 stone)
/ ALTERNATIVES	Purpose designed sling(3 kinds) Standard Mode / Stand Aid Mode Interchangeable
/ PACKAGE	1240×630×360 mm
/ G./N.W.	48/40 kg



TK-068 ACERO

/ FRAME	Steel, powder coating
/ SEAT TO FLOOR HEIGHT	420mm-570mm
/ TOTAL LENGTH	730mm
/ TOTAL WIDTH	560mm
/ TOTAL HEIGHT	810mm
/ FOLDED / DISMANTLED LENGTH	360mm
/ FOLDED / DISMANTLED WIDTH	560mm
/ FOLDED / DISMANTLED HEIGHT	680mm
/ LEG HEIGHT / FRAME HEIGHT	900mm
/ SUPPLY VOLTAGE	24V
/ MAXIMUM LOAD	120kg
/ LIFTING RANGE	150mm
/ BATTERY CAPACITY	24V4.4Ah
/ TOTAL WEIGHT	35kg
/ PACKAGE	600×430×760mm



Sillones elevadores eléctricos

Levantarse sin ayuda, sentarse sin miedo.

LA NECESIDAD

Una persona quiere seguir usando su sillón sin pedir ayuda para incorporarse.

LA RESPUESTA TAKUMI™

Sillones con elevación y reclinación eléctricas, mando alámbrico, tapizado técnico y motores independientes en los modelos que lo indican.

LA DIFICULTAD

El esfuerzo de levantarse desalienta el movimiento y aumenta el riesgo de caída.

LA EVIDENCIA

Cada modelo declara número de motores, capacidad de carga, medidas del asiento y alimentación eléctrica.

Compare número de motores y capacidad según el usuario.

CATEGORÍA 06 DE 12

TK-069

/STYLE	Classic
/MOTOR	Single Motor
/FRAME	Constructed with a mixed hardwood frame
/UPHOLSTERY	Tissue / PU cover
/SEAT	High density foam
/FEATURES	Electric reclining and lifting mechanism ; One remote for all the operations; Easily assembled in less than 15 minutes;
/COLOR OPTIONS	Beige / Gray / Black / Optional
/TOTAL WIDTH	800 mm
/SEAT WIDTH	540 mm
/ARMREST HEIGHT	140 mm
/SEAT HEIGHT	505 mm
/TOTAL HEIGHT	995 mm
/TOTAL LENGTH	1564 mm
/SEAT DEPTH	425 mm
/BACKREST HEIGHT	780 mm
/G.W.	52 kg
/WEIGHT CAPACITY	150 kg
/WARRANTY	1 Year
/OPTIONAL	Dual motor; Massage; Heat
/PACKAGE	42 pcs/20GP, 120 pcs/40HQ



TISSUE 221-1



TISSUE 221-14



TISSUE 221-23



BL0720-34



BL0720-37



YKM-03



YKPU-01



YKPU-02



YKPU-03

TK-070

/STYLE	Intelligence
/MOTOR	Single Motor
/FRAME	Reinforced and thickened steel pipes
/UPHOLSTERY	Tissue / PU cover
/SEAT	Filed high-density rebound sponge
/FEATURES	Electric reclining and lifting mechanism ; One remote for all the operations; Easily assembled in less than 15 minutes;
/COLOR OPTIONS	Beige / Gray / Black / Optional
/TOTAL WIDTH	800 mm
/SEAT WIDTH	550 mm
/ARMREST HEIGHT	125 mm
/SEAT HEIGHT	520 mm
/TOTAL HEIGHT	995 mm
/TOTAL LENGTH	1637 mm
/SEAT DEPTH	460 mm
/BACKREST HEIGHT	760 mm
/G.W.	45 kg
/WEIGHT CAPACITY	150 kg
/WARRANTY	1 Year
/OPTIONAL	Dual motor; Massage; Heat
/PACKAGE	70 pcs/20GP, 177 pcs/40HQ



TISSUE 221-1



TISSUE 221-14



TISSUE 221-23



BL0720-34



BL0720-37



YKM-03



YKPU-01



YKPU-02



YKPU-03



07

DIVISIÓN 01 · MOVILIDAD Y REHABILITACIÓN

Andadores con ruedas

Caminar más lejos, con apoyo.

LA NECESIDAD

Alguien quiere seguir caminando por su barrio con seguridad.

LA RESPUESTA TAKUMI™

Andadores de aluminio o acero con freno de manos, asiento de descanso, cesta y plegado vertical.

LA DIFICULTAD

La inestabilidad acorta el paseo y termina reduciendo la actividad.

LA EVIDENCIA

Cada modelo declara altura de empuñadura, capacidad de carga, peso, diámetro de rueda y medidas plegado.

Compare altura regulable y peso del andador según el usuario.

CATEGORÍA 07 DE 12

TK-071

ALUMINIO

NEW

/ FRAME	Aluminum
/ WHEELS	8", PU tires
/ SEAT	Supplied
/ SHOPPING BASKET	Supplied, nylon
/ HANDBRAKES	With locking mechanism
/ COLOR	Multiple colors can be customized
/ PACKAGE	1136 pcs/40HQ



Product features



Lightweight, foldable design



Adjustable armrest height



Cup holder storage

ITEM NO.	Seat Height (cm)	Overall Width Folded (cm)	Overall Width (cm)	Overall Length (cm)	Seat Width (cm)	Seat Depth (cm)	Front Caster Spec.	Height Adjustable (cm)	Weight Capacity (kg)	G./N. Weight (kg)	Carton Size (cm)
TK-071 F	53	24	57.5	69	45	/	8"	80.5 - 93	136	9.0/8.0	65x34.5x27.5

TK-072 ALUMINIO

/ FRAME	Aluminum
/ WHEELS	9", PU tires/ 8", TPR tires
/ SEAT	Supplied
/ SHOPPING BASKET	Supplied
/ HANDBRAKES	With locking mechanism
/ COLOR	Multiple colors can be customized 
/ PACKAGE	228 pcs/ 20GP, 591 pcs/ 40HQ



ITEM NO.	Seat Height (cm)	Width Inside Hand Grip (cm)	Overall Width (cm)	Overall Length (cm)	Seat Width (cm)	Seat Depth (cm)	Front Caster Spec.	Height Adjustable (cm)	Weight Capacity (kg)	G./N. Weight (kg)	Carton Size (cm)
											
TK-072	51	47.5	60.5	72	/	/	9"	68.5-78.7	130	8.2/7.7	73x25.5x77
	55	47.5	60.5	72	/	/	9"	68.2-82.8	130	8.4/7.9	73x25.5x79.5
	58	47.5	60.5	72	/	/	9"	73.7-91.4	130	8.5/8.0	73x25.5x82.5
	64	47.5	60.5	72	/	/	9"	76.8-97.2	130	8.7/8.2	73.5x25.4x87.5

TK-073 FIBRA DE CARBONO

/ FRAME	Carbon Fiber
/ WHEELS	9", TPR tires
/ SEAT	Supplied
/ SHOPPING BASKET	Supplied
/ HANDBRAKES	With locking mechanism
/ COLOR	Multiple colors can be customized 
/ PACKAGE	228 pcs/ 20GP, 591 pcs/ 40HQ



ITEM NO.	Seat Height (cm)	Width Inside Hand Grip (cm)	Overall Width (cm)	Overall Length (cm)	Seat Width (cm)	Seat Depth (cm)	Front Caster Spec.	Height Adjustable (cm)	Weight Capacity (kg)	G./N. Weight (kg)	Carton Size (cm)
											
TK-073	51	47.5	60.5	72	/	/	9"	70-78.7	130	7.6/7.1	73x25.5x77
	55	47.5	60.5	72	/	/	8"	69.7-82.8	130	7.7/7.2	73x25.5x79.5
TK-073	58	47.5	60.5	72	/	/	8"	75.2-91.4	130	7.8/7.3	73x25.5x82.5
	64	47.5	60.5	72	/	/	8"	76.8-97.2	130	7.9/7.4	73.5x25.4x87.5

TK-074 ALUMINIO

/ FRAME	Adjustable height
/ WHEELS	6"x1", TPR tires
/ SEAT	Padded with back support
/ SHOPPING BASKET	Supplied
/ HANDBRAKES	With locking mechanism
/ COLOR	Available in several colors
/ PACKAGE	216 pcs/ 20GP, 464 pcs/ 40GP, 520 pcs/ 40HQ



ITEM NO.	Seat Height (cm)	Width Inside Hand Grip (cm)	Overall Width (cm)	Overall Length (cm)	Seat Width (cm)	Seat Depth (cm)	Front Caster Spec.	Height Adjustable (cm)	Weight Capacity (kg)	G./N. Weight (kg)	Carton Size (cm)
TK-074	46	62	59	45	34	56	6"	85-96	110	8.6/6.6	62.5x23x85.5

TK-075 ALUMINIO

/ FRAME	Adjustable height
/ WHEELS	8"x1"
/ SEAT	ABS
/ SHOPPING BASKET	Supplied
/ HANDBRAKES	With locking mechanism
/ COLOR	Available in several colors
/ PACKAGE	230 pcs/ 20GP, 485 pcs/ 40GP, 540 pcs/ 40HQ



ITEM NO.	Seat Height (cm)	Width Inside Hand Grip (cm)	Overall Width (cm)	Overall Length (cm)	Seat Width (cm)	Seat Depth (cm)	Front Caster Spec.	Height Adjustable (cm)	Weight Capacity (kg)	G./N. Weight (kg)	Carton Size (cm)
TK-075	46	60	67	45	34	52	8"	81-92	110	9.6/7.6	59x26x71

TK-076 ACERO

/ FRAME	Adjustable height
/ WHEELS	8"x2", TPR tires
/ SEAT	Plastic with tray
/ SHOPPING BASKET	Supplied
/ HANDBRAKES	With locking mechanism
/ COLOR	Available in several colors
/ PACKAGE	260 pcs/ 20GP, 540 pcs/ 40GP, 640 pcs/ 40HQ



ITEM NO.	Seat Height (cm)	Width Inside Hand Grip (cm)	Overall Width (cm)	Overall Length (cm)	Seat Width (cm)	Seat Depth (cm)	Front Caster Spec.	Height Adjustable (cm)	Weight Capacity (kg)	G./N. Weight (kg)	Carton Size (cm)
TK-076	61	43	65	65	43	/	8"	83-96	110	15.0/13.0	59x26x71

TK-077 ACERO

/ FRAME	Adjustable height
/ WHEELS	8"x2", TPR tires
/ SEAT	/
/ SHOPPING BASKET	Supplied
/ HANDBRAKES	With locking mechanism
/ COLOR	Available in several colors
/ PACKAGE	336 pcs/ 20GP, 684 pcs/ 40GP, 756 pcs/ 40HQ (2pcs/carton)



ITEM NO.	Seat Height (cm)	Width Inside Hand Grip (cm)	Overall Width (cm)	Overall Length (cm)	Seat Width (cm)	Seat Depth (cm)	Front Caster Spec.	Height Adjustable (cm)	Weight Capacity (kg)	G./N. Weight (kg)	Carton Size (cm)
TK-077	/	55	66	/	/	/	8"	82-96	/	9.1/7.1	66x36x75

Sillas sanitarias

Intimidad y seguridad en el cuarto de baño.

LA NECESIDAD

Una persona necesita usar el baño con la menor asistencia posible.

LA RESPUESTA TAKUMI™

Sillas sanitarias fijas y con ruedas, con recipiente extraíble, reposabrazos abatibles y asiento con abertura.

LA DIFICULTAD

La distancia hasta el aseo y la falta de apoyo convierten un acto íntimo en un riesgo.

LA EVIDENCIA

Cada modelo declara altura del asiento, capacidad de carga, medidas generales y material de estructura.

Defina si requiere versión con ruedas, plegable o de altura regulable.

CATEGORÍA 08 DE 12

TK-078

ALUMINIO

NEW

/ FRAME	Powder coating
/ ARMREST	Flip back armrest/ Flip back and height-adjustable armrestst
/ FOOTREST	Swing in and away footrest
/ SEAT AND BACKREST	PU
/ FOOTPLATE	PP
/ COLOR	White



Product features



Swap between large and small wheels



Portable bucket with a pull-out lid



Convenient splitting

ITEM NO.	SIZE	Overall Length (cm)	Overall Width (cm)	Overall Height (cm)	Seat Width (cm)	Seat Height (cm)	Seat Depth (cm)	Back Width (cm)	Back Height (cm)	Weight Capacity (kg)	Front Caster Spec.	Rear Wheel Spec.	Net Weight (kg)	Carton Size (cm)
TK-078	16"	100	60	94	42	52	43	56	43.5	150	5"	24"	17.75	77x66.5x32.5
	18"	100	65	94	47	52	43	56	43.5	150	5"	24"	17.75	77x66.5x32.5
	20"	100	70	94	52	52	43	56	43.5	150	5"	24"	17.75	77x66.5x32.5
TK-078	22"	100	75	94	57	52	43	56	43.5	150	5"	24"	17.75	77x66.5x32.5
	24"	100	80	94	62	52	43	56	43.5	150	5"	24"	17.75	82x66.5x32.5
	16"	100	60	94	42	52	43	56	43.5	150	5"	5" & 24"	17.75	77x66.5x32.5
TK-078	18"	100	65	94	47	52	43	56	43.5	150	5"	5" & 24"	18.25	77x66.5x32.5
	20"	100	70	94	52	52	43	56	43.5	150	5"	5" & 24"	18.25	77x66.5x32.5
	22"	100	75	94	57	52	43	56	43.5	150	5"	5" & 24"	18.25	77x66.5x32.5
TK-078	24"	100	80	94	62	52	43	56	43.5	150	5"	5" & 24"	18.25	82x66.5x32.5
	16"	81.5	43	96.5/94/91.5	42	54.5/52/49.5	43	56	43.5	150	5"	5"	13.55	77x66.5x21.5
	18"	81.5	48	96.5/94/91.5	47	54.5/52/49.5	43	56	43.5	150	5"	5"	13.55	77x66.5x21.5
TK-078	20"	81.5	53	96.5/94/91.5	52	54.5/52/49.5	43	56	43.5	150	5"	5"	13.55	77x66.5x21.5
	22"	81.5	58	96.5/94/91.5	57	54.5/52/49.5	43	56	43.5	150	5"	5"	13.55	77x66.5x21.5
	24"	81.5	63	96.5/94/91.5	62	54.5/52/49.5	43	56	43.5	150	5"	5"	13.55	77x66.5x21.5

TK-079 TK-080

ACERO

/ FRAME	Powder coating
/ REAR WHEEL	With brake
/ ARMREST	Full length padded armrest
/ FOOTREST	Swing away footrest
/ SEAT AND BACKREST	Removable padded seat and PVC backrest
/ COLOR	Plastic



YK4010



YK4030

ITEM NO.	Seat Width (cm)	Overall Height (cm)	Seat Height (cm)	Front Caster Spec.	Rear Wheel Spec.	Weight Capacity (kg)	G./N. Weight (kg)	Carton Size (cm)
TK-079 1010	44	92	52	5"	5"	115	15.5/13.0	59x56x60
TK-080 1030	44	95	52	5"	5"	115	14.5/12.5	58x52.5x54.5

TK-081

ACERO

/ FRAME	Powder coating
/ ARMREST	HDPE + S1010
/ TIPS	Rubber+A3
/ SEAT COVER	PP
/ BUCKET SET	PP
/ COLOR	Grey
/ CAPACITY	114kg/ 250lbs



ITEM NO.	Seat Width (cm)	Overall Height (cm)	Seat Height (cm)	Front Caster Spec.	Rear Wheel Spec.	Weight Capacity (kg)	G./N. Weight (kg)	Carton Size (cm)
TK-081 1120	53	63.5-73.5	42-52	/	/	130	12.0/11.0	62x35x50

TK-082 ACERO

/ FRAME	Single cross brace, powder coating
/ FRONT WHEEL	8"x2", PU tires
/ REAR WHEEL	24" spoke wheels, PU tire
/ ARMREST	Detachable, full length armrest, PVC armpad
/ FOOTREST	Swing away footrest
/ SEAT AND BACKREST	U shape seat, PVC backrest
/ COMMODE	Plastic
/ FRONT FORK	Steel
/ FOOT PLATE	Plastic
/ PACKAGE	98 pcs/ 20GP, 228 pcs/ 40HQ



ITEM NO.	Seat Width (cm)	Overall Height (cm)	Seat Height (cm)	Front Caster Spec.	Rear Wheel Spec.	Weight Capacity (kg)	G./N. Weight (kg)	Carton Size (cm)
TK-082 4020	45	92	53.5	8"	24"	115	24.1/21.4	82x35x94

TK-083 ACERO

/ FRAME	Single cross brace, powder coating
/ FRONT WHEEL	8"x2", PU tires
/ REAR WHEEL	24" spoke wheels, Pneumatic / PU tires
/ ARMREST	Flip back with desk length
/ FOOTREST	Swing away footrest (Detachable)
/ SEAT AND BACKREST	Removable padded seat and Nylon backrest
/ COMMODE	Plastic
/ FRONT FORK	Steel
/ FOOT PLATE	Plastic
/ PACKAGE	135 pcs/ 20GP, 270 pcs/ 40GP, 320 pcs/ 40HQ



ITEM NO.	Seat Width (cm)	Overall Height (cm)	Seat Height (cm)	Front Caster Spec.	Rear Wheel Spec.	Weight Capacity (kg)	G./N. Weight (kg)	Carton Size (cm)
TK-083	46	91	54	8"	24"	120	23.0/21.0	82x35x94
	51	91	54	8"	24"	120	24.5/22.5	82x35x94

Sillas de ducha

Higiene diaria sin sobresaltos.

LA NECESIDAD

Alguien quiere ducharse a diario sin depender de otra persona.

LA RESPUESTA TAKUMI™

Sillas y taburetes de ducha en aluminio con contera antideslizante, asiento perforado y altura regulable.

LA DIFICULTAD

El suelo mojado es donde ocurren la mayoría de las caídas domésticas.

LA EVIDENCIA

Cada modelo declara altura regulable, capacidad de carga, medidas del asiento y material.

Compare altura regulable y superficie de asiento según el espacio de ducha.

CATEGORÍA 09 DE 12

TK-084

/ FRAME	Height adjustable
/ TUBE	Aluminum
/ SEAT AND BACKREST	High-grade PVC; U-shaped cut



ITEM NO.	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height (cm)	G./N. Weight (1pcs) (kg)	G./N. Weight (2pcs) (kg)	Carton Size 1 pcs per carton (cm)	Carton Size 2 pcs per carton (cm)
TK-084 10	50	30	/	43	2.4/1.9	5.0/4.0	60×11.5×36	60×18×36

TK-085

/ FRAME	Height adjustable with backrest
/ TUBE	Aluminum
/ SEAT AND BACKREST	High-grade PVC; U-shaped cut



ITEM NO.	Seat Width (cm)	Seat Depth (cm)	Back Height (cm)	Floor to Seat Height (cm)	G./N. Weight (1pcs) (kg)	G./N. Weight (2pcs) (kg)	Carton Size 1 pcs per carton (cm)	Carton Size 2 pcs per carton (cm)
TK-085	50	30	77	43	3.2/2.7	6.0/5.4	60×16×36	60×23×36

Mesas de cama

El día a día al alcance de la mano.

LA NECESIDAD

Un paciente encamado quiere comer, leer y trabajar sin incorporarse del todo.

LA RESPUESTA TAKUMI™

Mesas de cama con altura regulable, tablero inclinable, base en C y ruedas con freno.

LA DIFICULTAD

Sin una superficie a la altura correcta, cada actividad exige ayuda.

LA EVIDENCIA

Cada modelo declara rango de altura, medidas del tablero, capacidad de carga y peso.

Compare rango de altura y tipo de base según la cama.

CATEGORÍA 10 DE 12

TK-086

/ FRAME	Molded composite top; Chrome plated "H" base
/ CASTORS	Two locking
/ HEIGHT	28.3" —41.7"
/ CARTON SIZE	78×46×14 cm
/ WEIGHT	10 kg/ 8 kg
/ PACKAGE	550pcs/ 20" GP, 1100pcs/ 40" GP, 1300 pcs/ 40HQ

TK-087

/ FRAME	Molded composite top
/ CASTORS	Two locking
/ HEIGHT	710-1010 mm
/ Panel Size	770×400 mm
/ Carton Size	810×430×125 mm
/ G./N. Weight	9.8 kg / 8.8 kg
/ Package	1600 pcs/40HQ

TK-088

/ FRAME	Molded composite top, powder coating, H base
/ CASTORS	Two locking
/ HEIGHT	725-1195 mm
/ Panel Size	770×400 mm
/ Carton Size	815×460×80 mm
/ G./N. Weight	9.8 kg / 8.8 kg
/ Package	2200 pcs/40HQ

TK-089

/ FRAME	Molded composite top, powder coating, H base
/ CASTORS	Two locking
/ HEIGHT	700-1000 mm
/ Panel Size	600×400 mm
/ Carton Size	650×420×80 mm
/ G./N. Weight	8.5 kg / 8.0 kg
/ Package	1374 pcs/20GP, 2799 pcs/40HQ



NEW



NEW



NEW



Andadores y bastones

El primer apoyo, el más discreto.

LA NECESIDAD

Una persona quiere sostener su marcha con el mínimo equipo posible.

LA RESPUESTA TAKUMI™

Andadores fijos y plegables, bastones de una y cuatro patas, y muletas de aluminio con altura regulable.

LA DIFICULTAD

Un apoyo mal medido cambia la postura y traslada el problema a la espalda.

LA EVIDENCIA

Cada referencia declara rango de altura, capacidad de carga, peso y material.

Defina altura del usuario y nivel de apoyo requerido.

CATEGORÍA 11 DE 12

Andadores y bastones



TK-094



TK-096

TK-097



TK-090



TK-091



TK-092



TK-093



TK-095



TK-098



TK-099

ITEM NO.	Overall Height (cm)	G./N. Weight (kg)	ITEM NO.	Overall Height (cm)	G./N. Weight (kg)	ITEM NO.	Overall Height (cm)	G./N. Weight (kg)
TK-090	71.12-93.98	1.40/1.30	TK-092 S	78.74-109.22	0.81/0.73	TK-098	76.00-94.00	3.50/3.10
TK-091 L	132.08-152.4	1.00/0.90	TK-093	71.40-94.50	1.00/0.90	TK-099	77.00-95.00	2.75/2.35
TK-091 M	111.76-132.08	0.97/0.88	TK-094	78.00-89.00	0.42/0.37			
TK-091 S	93.98-114.3	0.85/0.78	TK-095	120cm(Fold 35cm)	0.41/0.38			
TK-092 L	107.95-138.43	0.90/0.81	TK-096	73.66-96.52	0.40/0.30			
TK-092 M	95.25-125.73	0.89/0.81	TK-097	78.74-101.60	0.48/0.38			

Cojines

Horas sentado sin pagar el precio.

LA NECESIDAD

Quien pasa el día sentado necesita que la presión se reparta.

LA RESPUESTA TAKUMI™

Cojines de asiento en espuma, gel y aire, con funda extraíble y medidas normalizadas.

LA DIFICULTAD

La presión sostenida en las mismas zonas es el origen de la lesión por presión.

LA EVIDENCIA

Cada referencia declara medidas, material del núcleo y tipo de funda.

Compare material y medida según las horas de sedestación.

CATEGORÍA 12 DE 12


TK-100

TK-101


/ MATERIAL	TK-100: High rebound material TK-101: Slow rebound material
/ WEIGHT CAPACITY	130 kg
/ DEPTH	430 mm
/ WIDTH	460 mm
/ SEAT THICKNESS	80 mm
/ LOWER THIGH SUPPORT THICKNESS	70 mm
/ INNER THIGH SUPPORT THICKNESS	45 mm
/ EXTERNAL THIGH SUPPORT HEIGHT	45 mm
/ PELVIC PROFILE HEIGHT	35 mm



Ergonomic design

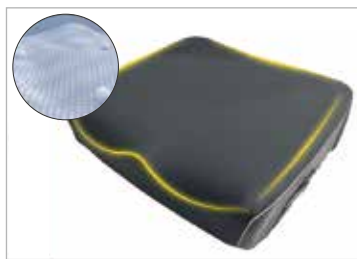

Soft and comfortable fabric, curve wrap around the hip

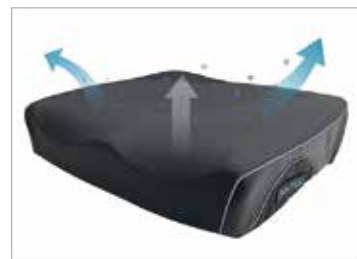

Double-sided honeycomb design



TK-100: high rebound material



TK-101: slow rebound material



Waterproof hidden zipper



Accesorios

Options and components available across the wheelchair range. Availability depends on model and configuration.



Half Folding



Tension Backrest



3"transit Wheel



Drum Brake



Attendant Brake



Anti-tippers



Reclining High Back




Elevating Legrest



Alu ELR




Quick Release Axle



Thick Cushion



Tannin Cloth Backrest



Reflector



Safety Belt



Breathable Backrest



Height Adjustable Armrest



Slope Armrest



Comfort Armrest



Full Length Armrest



Desk Armrest

Accesorios

Options and components available across the wheelchair range. Availability depends on model and configuration.



Comfort Footrest



Footrest



Leg Support



Heel Strap



Nylon/Aluminum/Plastic Footplate



Front Fork
(plastic/steel/aluminum)



Angle Adjustable Footplate



Steel/Aluminum Brake



Front Wheel
(PVC tire, RUBBER, PU tire)



Handrim
(Plastic/ Steel/ Aluminum)



8/9 MAG Rear Wheel



Spoke Rear Wheel
(Pneumatic tire/PU tire)



Breathable Cushion



Velcro



Push Bar



Head Rest Pillow




Wheelchair Cushion


Colores de estructura

Standard liquid painting and powder coating finishes. Color codes are used for quotation and ordering.

LIQUID PAINTING

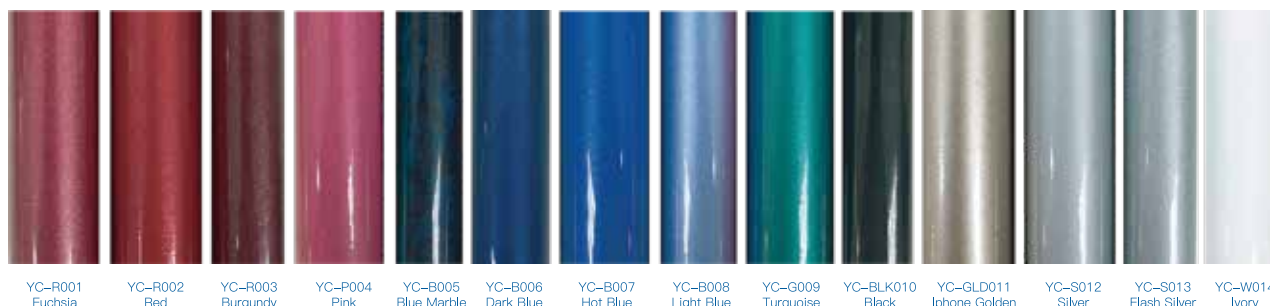

POWDER COATING

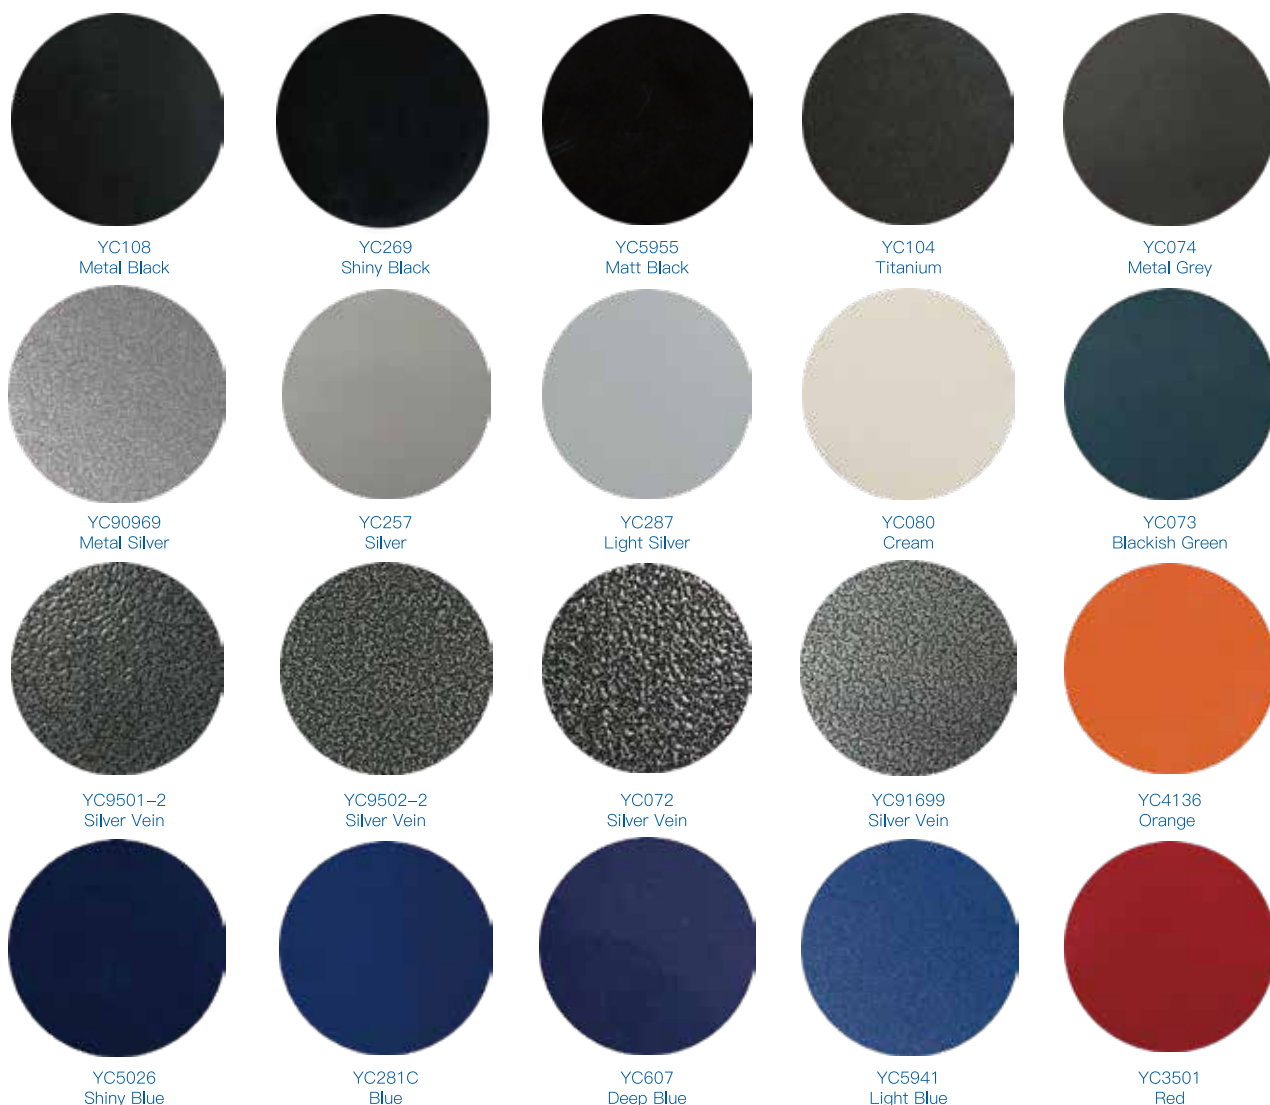

02

DIVISIÓN 02

Cuidado Hospitalario

CUIDADO QUE
ACOMPAÑA TODA
LA ESTANCIA

Camas hospitalarias y de UCI, equipamiento de cuidado del paciente y superficies de prevención de úlceras para cuidados críticos, hospitalización general y larga estancia.

CAMAS HOSPITALARIAS

CAMAS UCI

CUIDADO DEL PACIENTE

PREVENCIÓN DE ÚLCERAS

SUPERFICIES DE APOYO

SISTEMAS ANTIESCARAS

CON EL RESPALDO DE UN SOCIO INDUSTRIAL ESPECIALIZADO EN EQUIPAMIENTO HOSPITALARIO


Cama UCI eléctrica multifuncional

CUIDADOS INTENSIVOS

TAKUMI™ · CUIDADO HOSPITALARIO

Cama de cuidados intensivos diseñada para pacientes críticos que requieren monitoreo constante y reposicionamiento frecuente. Sistema de pesaje integrado, plataforma totalmente radiotransparente y posiciones eléctricas para el manejo respiratorio y circulatorio.

Tipo	Cama hospitalaria UCI eléctrica multifuncional
Capacidad de carga segura	250 kg
Estructura principal	Acero inoxidable de alta resistencia, diseño ergonómico
Dimensiones (largo x ancho)	200 cm x 90 cm
Superficie de descanso	3 secciones: cabecera, asiento y piernas
Ajuste de espalda / cabecera	0° – 60°
Movimiento de muslos / rodillas	Eléctrico, con control remoto
Trendelenburg / anti-Trendelenburg	Posiciones eléctricas para drenaje postural
Báscula integrada	220 kg, con función de tara y pantalla digital
Plataforma	100 % radiotransparente, con porta chasis para RX
Barandas	Abatibles a ambos lados
Frenos	Sistema centralizado
Protección de esquinas	Cuatro parachoques
Posición RCP	Activación rápida por botón
Posición de silla cardiaca	Sí
Portasueros	Dos, ajustables
Controles	Control remoto multifuncional
Sistema eléctrico	Actuadores silenciosos con protección de sobrecarga
Se entrega con	Colchón viscoelástico y colchón antiescaras con compresor

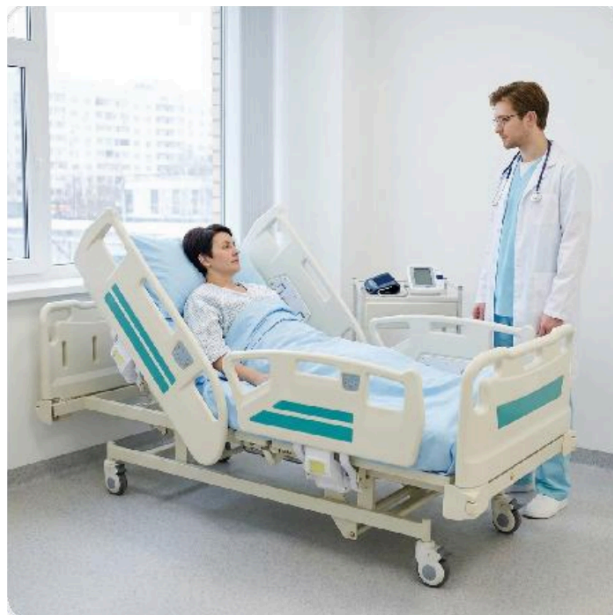

Pesaje integrado

Báscula de 220 kg con función de tara y pantalla digital integrada en la cama, que permite registrar el peso sin movilizar al paciente.

Posiciones funcionales

Trendelenburg, anti-Trendelenburg, silla cardiaca y liberación rápida para RCP, accionadas eléctricamente o por botón.

Plataforma radiotransparente

Superficie radiotransparente con porta chasis integrado para estudios de imagen a pie de cama.

Acceso y seguridad

Barandas abatibles a ambos lados, frenos centralizados y cuatro parachoques para procedimientos y traslados seguros.

Cama hospitalaria eléctrica de 5 funciones

HOSPITALIZACIÓN

TAKUMI™ · CUIDADO HOSPITALARIO

Cama multifuncional de accionamiento eléctrico para hospitalización general, áreas de recuperación y larga estancia, con cinco movimientos motorizados, batería de respaldo, liberación de emergencia para RCP y barandas retráctiles de longitud completa.

Tipo	Cama hospitalaria eléctrica de 5 funciones
Capacidad de carga segura	220 kg máximo
Dimensiones (largo x ancho)	190 cm x 80 cm
Estructura principal	Acero con recubrimiento electrostático de poliéster
Superficie de descanso	4 secciones articuladas
Movimientos motorizados	Espaldar · sección de rodillas y piernas · altura · Trendelenburg · anti-Trendelenburg
Rango del espaldar	0° – 60°
Sección de rodillas y piernas	0° – 30°
Rango de elevación	≥ 25 cm
Trendelenburg / anti-Trendelenburg	± 12°
Barandas	ABS / polipropileno, retráctiles, de longitud completa
Protección de esquinas	Parachoques en las cuatro esquinas
Ruedas	Cuatro ruedas con giro de 360° y sistema de freno centralizado
Controles	Panel de control a cada lado de la cama y mando alámbrico con función de bloqueo
Función de emergencia	Liberación rápida para RCP
Alimentación	110 V – 125 V / 60 Hz
Batería de respaldo	Incluida
Indicador de ángulo	Integrado en el espaldar
Se entrega con	Colchón de grado hospitalario y portasueros desmontable



Cinco movimientos motorizados

Espaldar, sección de rodillas, altura, Trendelenburg y anti-Trendelenburg, ajustables desde cualquiera de los dos lados de la cama.

Acceso desde todos los lados

Barandas retráctiles de longitud completa y ruedas de 360° con freno centralizado, para procedimientos a pie de cama y traslados seguros.

Liberación de emergencia para RCP

Liberación rápida para reanimación, con batería de respaldo que mantiene disponible el posicionamiento ante una interrupción eléctrica.

Ergonomía para el equipo

La regulación eléctrica de altura acerca la superficie de trabajo al personal, y no al revés.

Colchón de aire de presión alternante

PREVENCIÓN DE ÚLCERAS

TAKUMI™ · CUIDADO HOSPITALARIO

Superficie de apoyo de presión alternante para la prevención de úlceras por presión, diseñada para adaptarse a camas hospitalarias y domiciliarias estándar. Veintidós celdas de aire independientes se inflan y desinflan en ciclos alternos, redistribuyendo la presión corporal de forma automática.

Tipo	Colchón de aire de presión alternante con bomba
Tamaño del producto	2000 mm × 900 mm
Altura inflada	Aproximadamente 5 cm ± 1 cm
Capacidad de carga segura	135 kg
Rango de presión	700 hPa – 1060 hPa · rango sujeto a validación técnica
Presión máxima de salida de la bomba	No menor a 12 kPa
Material del colchón	PVC de grado médico
Grosor del material	28 milésimas
Construcción	Moldeado de una sola pieza
Celdas de aire	22 celdas independientes, tubos A y B
Ciclo	Ciclo alternante completo cada 12 minutos
Compatibilidad	Camas hospitalarias y domiciliarias estándar



Veintidós celdas independientes

Los tubos A y B se inflan de forma alterna, de modo que el apoyo se desplaza de manera continua sin intervención manual.

Presión ajustable

La bomba incorpora un único control de regulación de presión. Rango de ajuste sujeto a validación técnica.

Ciclo de doce minutos

Un ciclo alternante completo cada doce minutos redistribuye la presión sobre las prominencias óseas.

PVC de grado médico

Construcción moldeada de una pieza en PVC de grado médico de 28 milésimas, para limpieza y desinfección entre pacientes.

03

DIVISIÓN 03

Odontología

EQUIPAMIENTO
PARA LA
PRÁCTICA
DENTAL
MODERNA

Unidades dentales, lámparas de operación y equipamiento de clínica para consultorios dentales, servicios odontológicos hospitalarios y programas institucionales de salud bucal.

UNIDADES DENTALES

SILLONES DENTALES

LÁMPARAS DE OPERACIÓN

PIEZAS DE MANO

COMPRESORES

TABURETES

ACCESORIOS

CON EL RESPALDO DE UN SOCIO INDUSTRIAL ESPECIALIZADO EN EQUIPAMIENTO DENTAL

TK-102

Unidad dental integral · modelo insignia

Una unidad para consultas de alta exigencia: estructura reforzada y confort pensado para tratamientos largos.

Unidad de tratamiento con sillón integrado, sistema de entrega, lámpara de operación y módulo de asistente. Base de acero de 14 mm de grosor y respaldo metálico en forma de mariposa, con capacidad de carga de hasta 200 kg y resortes neumáticos.

Respaldo ergonómico en mariposa

Se adapta a la curva de la espalda, con elevación lumbar y reposacabezas de ajuste multiángulo para sujetar cintura y cuello.

Acolchado de alta elasticidad

Acolchado de alta elasticidad que alivia la presión y sostiene al paciente durante tratamientos prolongados.

Tapicería de microfibra

Revestimiento de microfibra de tacto suave, con costura reforzada y superficie de fácil limpieza.

Arranque y parada suaves


Control de motor optimizado que evita tirones al iniciar o detener el sillón.

ILUMINACIÓN

Lámpara TK-103: LED con brillo regulable de 5.000 a 55.000 lux, pantalla digital de brillo y temperatura de color, cinco modos de luz y mango desmontable para limpieza.

Especificaciones sujetas a confirmación según configuración y mercado. Consulte la disponibilidad de documentación técnica y regulatoria.

Solicite la configuración y la ficha técnica completa de esta unidad →

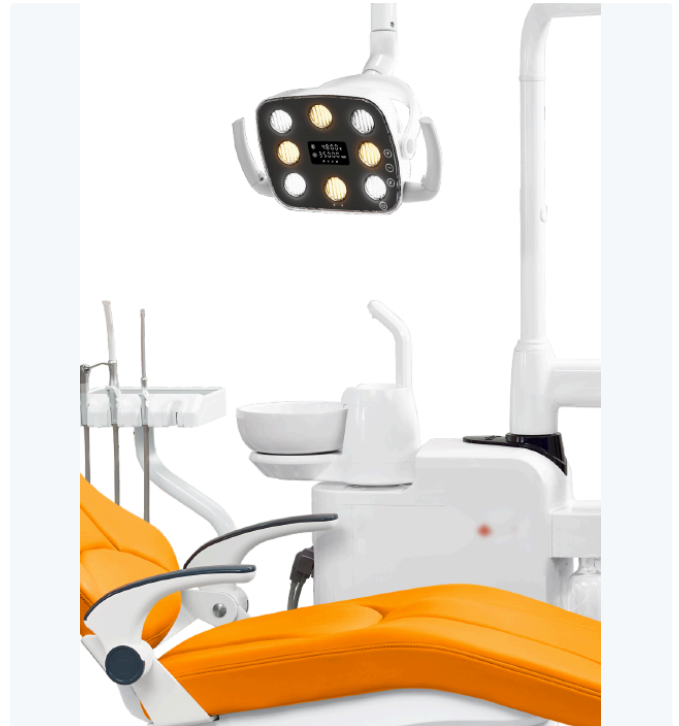

**TK-102**

Unidad dental integral · modelo insignia

**Sólido como una roca**

La base de acero de 14 mm de grosor y el respaldo metálico en forma de mariposa soportan una carga de hasta 200 kg. La unidad dental está equipada con resortes neumáticos de alta calidad para garantizar la seguridad.

Comodidad durante la operación

Nuevo programa de control del motor, algoritmo de control optimizado y cambio flexible de la velocidad del motor. Al arrancar o parar el sillón dental, los pacientes se sienten cómodos, lo que proporciona una experiencia de tratamiento más suave.

TK-104

Unidad dental · operación diestra y zurda

Diseñada para que el equipo trabaje a cuatro manos sin perder estabilidad ni tiempo.

Unidad de tratamiento con varillaje central que reduce vibraciones y sistema de control digital con pantalla LCD. Cambio rápido entre operación diestra y zurda para adaptarse al profesional y a la sala.

Varillaje central antivibración

El centro de gravedad centrado reduce las vibraciones durante el movimiento del sillón.

Gabinete giratorio

Puede girarse para una operación a cuatro manos más eficiente y separarse para pasar por puertas estrechas.

Estructura pesada y estable

Placa inferior de 16 mm y placa curva de aluminio fundido a presión de 32 mm; peso total de 300 kg.

Control digital LCD


Pantalla que hace el sistema de control más intuitivo para el operador.

ILUMINACIÓN

Lámpara TK-105 de la misma serie, con múltiples bombillas LED y ajuste continuo de brillo.

Especificaciones sujetas a confirmación según configuración y mercado. Consulte la disponibilidad de documentación técnica y regulatoria.

Solicite la configuración y la ficha técnica completa de esta unidad →

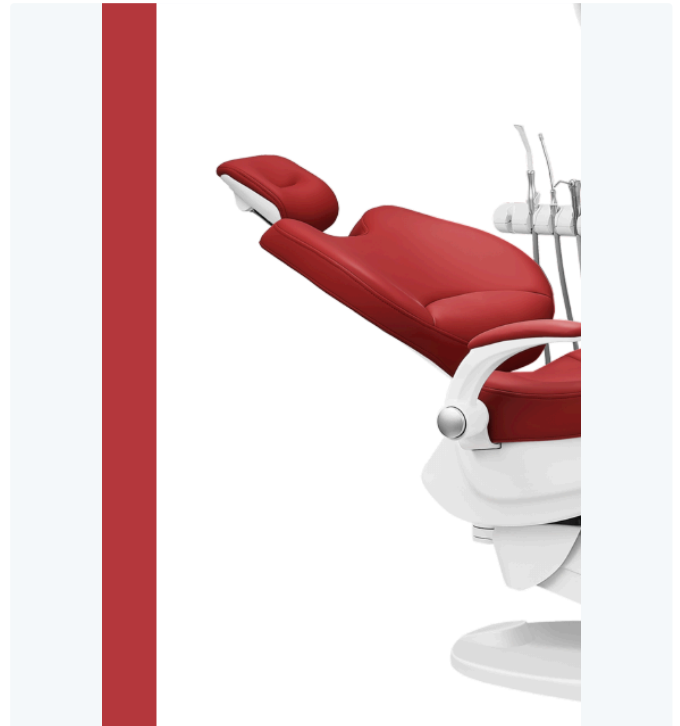

**TK-104**

Unidad dental · operación diestra y zurda

**Diseño Innovador Que
Protégé Cada Sonrisa**

Arranque y parada
lentos/compensación de
varillaje/sensación de asiento
confortable/multifuncional

Imagen de referencia del fabricante. La configuración final, los acabados y el equipamiento incluido se definen para cada proyecto.

TK-106

Unidad dental · nuevo diseño 2025

Estructura renovada, más estable y robusta, con caja lateral rediseñada.

Unidad de tratamiento con nuevo diseño de caja lateral, marco reforzado y mecánica de arranque y parada flexibles. Sistema de control con experiencia de uso más fluida.

Nuevo marco de diseño

Placa doblada de aluminio fundido a presión, respaldo de metal y placa inferior engrosada.

Apoyabrazos de metal

Apoyabrazos metálicos con diseño mecánico de enlace intermedio.

Arranque y parada flexibles

Enlace de arranque y parada que suaviza cada transición de posición.

Escupidera de cerámica giratoria

Cojín de asiento de doble sección y escupidera giratoria para facilitar la limpieza.

ILUMINACIÓN

Lámpara TK-107: ajuste continuo de 5.000 a 40.000 lux, modos de luz blanca, amarilla y mixta, visualización digital e índice de reproducción cromática Ra > 90.

Especificaciones sujetas a confirmación según configuración y mercado. Consulte la disponibilidad de documentación técnica y regulatoria.

Solicite la configuración y la ficha técnica completa de esta unidad →

Dental Chair



**TK-106**

Unidad dental · nuevo diseño 2025

**Nuevo Diseño Que Lidera El Futuro**

Nuevo diseño de caja lateral, elegante y hermoso.

Imagen de referencia del fabricante. La configuración final, los acabados y el equipamiento incluido se definen para cada proyecto.

TK-108

Unidad dental · cirugía de implantes

Configurada para cirugía oral: iluminación quirúrgica, carro de instrumental y bandejas de acero inoxidable.

Unidad de tratamiento orientada a implantología, con lámpara de cirugía de amplio ángulo de proyección y foco rectangular sin sombras, bandeja de instrumentos con carro móvil y ajuste de agua independiente para la pieza de mano.

Lámpara de cirugía

Brillo de 90 klux con ajuste continuo, índice de reproducción cromática Ra > 92 y temperatura de color de 3.500 a 5.500 K.

Carro móvil de instrumental

Bandeja de acero inoxidable sobre carro con bloqueo de cuatro ruedas y almohadilla de silicona.

Tres posiciones de memoria


Posiciones programables y colgador de cinco piezas de mano con rotación de 45°.

Puesto de asistente ampliado

Gran puesto de asistente y soporte para monitor de ECG.

Especificaciones sujetas a confirmación según configuración y mercado. Consulte la disponibilidad de documentación técnica y regulatoria.

Solicite la configuración y la ficha técnica completa de esta unidad →

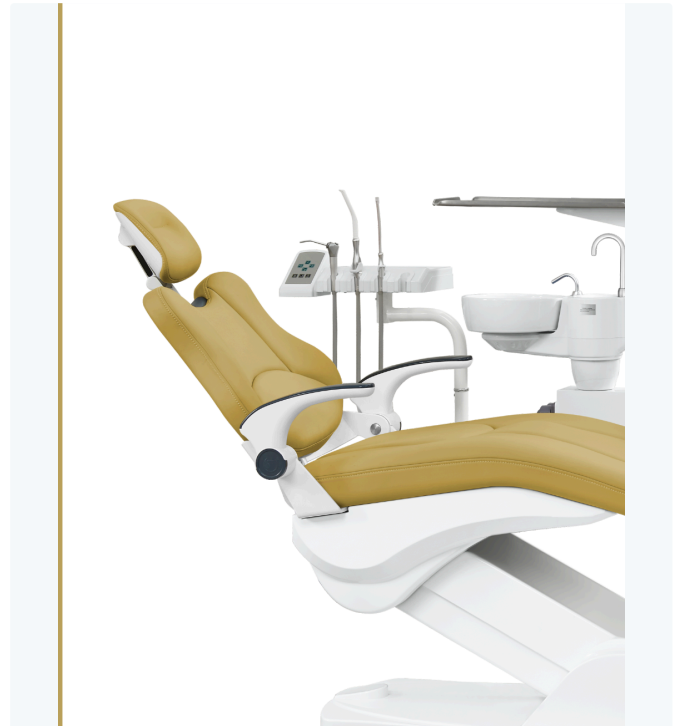



TK-108

Unidad dental · cirugía de implantes



Imagen de referencia del fabricante. La configuración final, los acabados y el equipamiento incluido se definen para cada proyecto.

TK-109

Unidad dental · gabinete de piso

Máxima estabilidad durante el tratamiento gracias al gabinete anclado al piso.

Unidad de tratamiento con gabinete de piso, nueva pantalla LCD que muestra en tiempo real el estado del sillón y la velocidad de rotación de la pieza de mano, y curvas ergonómicas para un asiento cómodo y saludable.

Gabinete de piso

Toda la máquina gana estabilidad y seguridad durante el tratamiento.

Pantalla LCD renovada

Interfaz actualizada con visor de radiografía, nueve posiciones de memoria y cambio de fuente de agua en un paso.

Posiciones automáticas

Posición de emergencia y posición de escupidera de un solo paso.

Escupidera y bandeja auxiliar


Escupidera de cerámica giratoria a 90° y bandeja auxiliar grande con control inductivo.

ILUMINACIÓN

Luz LED ajustable de 8 bombillas con temperatura de color y brillo regulables.

Especificaciones sujetas a confirmación según configuración y mercado. Consulte la disponibilidad de documentación técnica y regulatoria.

Solicite la configuración y la ficha técnica completa de esta unidad →

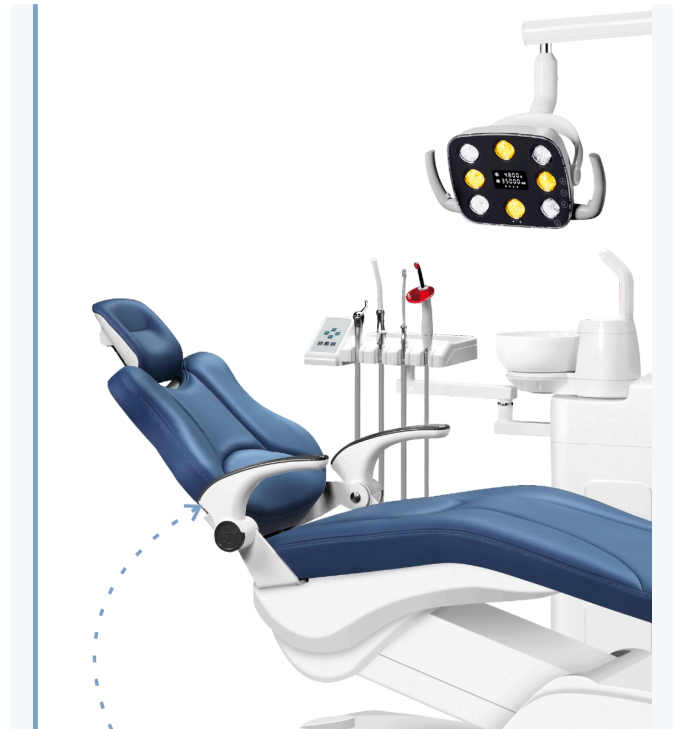

**TK-109**

Unidad dental · gabinete de piso

**El Diseño De The Backres**

Puede brindarle una sensación de tratamiento relajada y cómoda.

Nueva Pantalla LCD

Interfaz UI recientemente actualizada, pantalla digital inteligente que muestra en tiempo real el estado del sillón dental y la velocidad de rotación de la pieza de mano, y los datos son más intuitivos.

Multifuncional Y Fácil De Operar

Posición de emergencia, posición de escupidera de un paso, nueve posiciones de memoria, visor de película de rayos X en la pantalla LCD, etc., un paso para cambiar la fuente de agua.

TK-110

Unidad dental · flujo de trabajo fluido

Pensada para un flujo de trabajo continuo y un tratamiento agradable para pacientes de todas las edades.

Unidad de tratamiento con gabinete giratorio para operación a cuatro manos, nueva pantalla LCD multifuncional, reposacabezas móvil y caja de pañuelos de gran capacidad.

Gabinete giratorio

Gira hacia afuera para una operación cómoda a cuatro manos durante el tratamiento.

Colgador giratorio de 45°

Para seis piezas de mano, ajustable según los hábitos del profesional.

Arranque y parada suaves

Nueva solución de control de motor con algoritmos optimizados.

Pantalla multifuncional

Visualización digital del estado de trabajo, con interruptor de gestos y mango desmontable en la lámpara.

ILUMINACIÓN

Lámpara TK-111: 6 bombillas LED, 5 modos de luz, 3.500–5.500 K y 6.000–39.000 lux con atenuación continua.

Especificaciones sujetas a confirmación según configuración y mercado. Consulte la disponibilidad de documentación técnica y regulatoria.

Solicite la configuración y la ficha técnica completa de esta unidad →



**TK-110**

Unidad dental · flujo de trabajo fluido

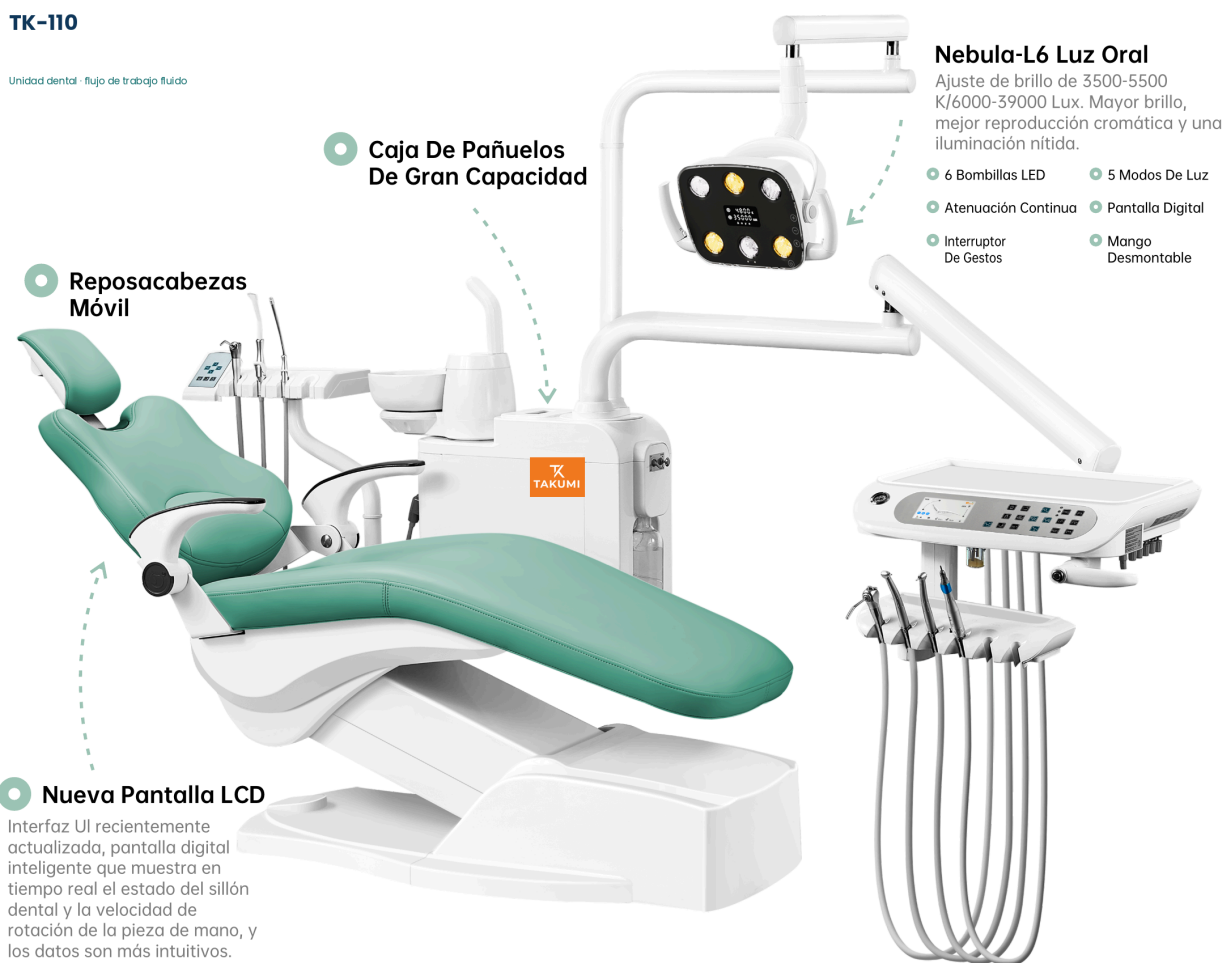


Imagen de referencia del fabricante. La configuración final, los acabados y el equipamiento incluido se definen para cada proyecto.

TK-112

Unidad dental · clínicas de alta gama

Configuración completa para clínica dental de alta gama, con carro de implantes y bandeja de acero inoxidable.

Unidad de tratamiento con diseño de sillón sincronizado, cojín de cuero de microfibra seleccionado, caja de suelo exterior, sistema de bloqueo del sillón y piezas de mano de alta y baja velocidad incluidas en la configuración.

Bandeja de acero inoxidable

Duradera y esterilizable, sobre carro móvil regulable en altura.

Carro de implantes

Carro tipo implante con bandeja de acero inoxidable incluido en la configuración.

Posiciones de trabajo

Posición de escupir, de tratamiento y de emergencia; función de inicio y parada suave.

Opciones

Detartrador integrado y anticolidión del respaldo, disponibles como opción.

Especificaciones sujetas a confirmación según configuración y mercado. Consulte la disponibilidad de documentación técnica y regulatoria.

Solicite la configuración y la ficha técnica completa de esta unidad →

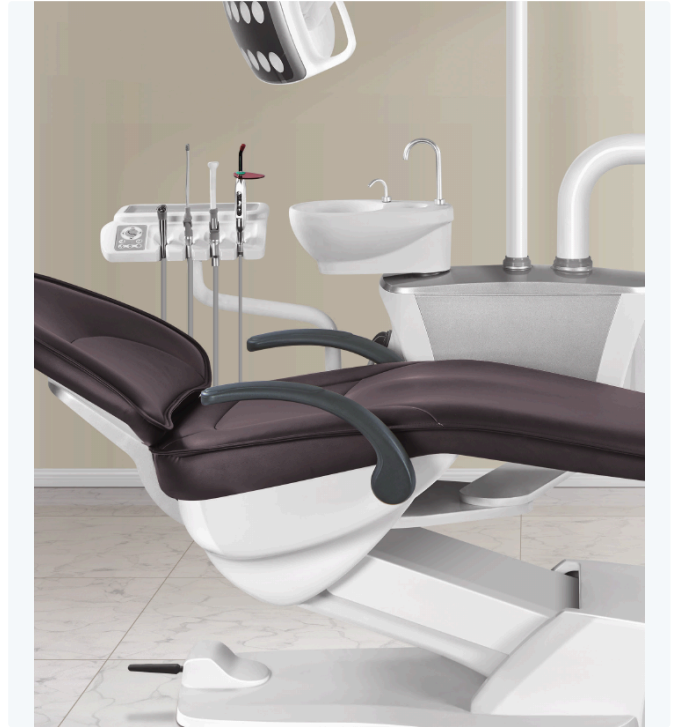




Imagen de referencia del fabricante. La configuración final, los acabados y el equipamiento incluido se definen para cada proyecto.

TK-113

Unidad dental · compacta

Concepto de asiento inteligente y superficie de trabajo amplia en una unidad compacta.

Unidad de tratamiento con asiento diseñado sobre la forma del cuerpo humano, bandeja de instrumental de 600 × 300 mm y consola flexible y estable. Indicada para pacientes que reciben tratamientos largos.

Bandeja de trabajo grande

Superficie de 600 × 300 mm con soporte giratorio de pieza de mano.

Cojín de sillón cómodo

Selección de alta calidad para pacientes acostados durante tratamientos prolongados.

Luz bucal LED reflectante

Luz fría LED inductiva con brillo ajustable.

Escupidera giratoria y reposacabezas

Escupidera de cerámica que se acerca al paciente y reposacabezas ajustable que apoya el cuello.

Especificaciones sujetas a confirmación según configuración y mercado. Consulte la disponibilidad de documentación técnica y regulatoria.

Solicite la configuración y la ficha técnica completa de esta unidad →



**TK-113**

Unidad dental · compacta

**El Concepto De Asiento Inteligente**

El diseño del asiento se basa en la forma del cuerpo humano para proporcionar al paciente una sensación de comodidad y apoyo.

Diseño Cómodo Del Cojín De La Silla

La selección de alta calidad es más adecuada para pacientes que se encuentran acostados, especialmente para pacientes que reciben un tratamiento a largo plazo.

Imagen de referencia del fabricante. La configuración final, los acabados y el equipamiento incluido se definen para cada proyecto.

Lámparas de operación

TK-103 · TK-105 · TK-107 · TK-111 · TK-114 a TK-119

Luz precisa para diagnóstico y tratamiento: LED, regulación continua y modos de temperatura de color.



FUENTES LED

Lámparas de operación con fuentes LED y gran punto de luz que cubre toda la cavidad bucal.

REGULACIÓN CONTINUA

Ajuste continuo de brillo y de temperatura de color, con pantalla digital en los modelos que la incorporan.

MONTAJE

Configuraciones montadas en la unidad y de brazo giratorio, con mango desmontable para limpieza.

Especificaciones sujetas a confirmación según configuración y mercado. Consulte la disponibilidad de documentación técnica y regulatoria.

Solicite la lámpara adecuada para su unidad y su sala →

Equipamiento de clínica

Piezas de mano · compresores · taburetes · tapicería

Todo lo que rodea a la unidad, seleccionado para el mismo estándar.



PIEZAS DE MANO

Turbinas dentales de alta velocidad, con y sin iluminación LED, y contra-ángulos de baja velocidad.

COMPRESORES DE AIRE

Compresores silenciosos libres de aceite en tres capacidades, para instalación en clínica.

TABURETES

Taburetes de operador y asistente tipo silla de montar y con respaldo, con regulación de altura.



TAPICERÍA · MÁS DE CUARENTA COLORES

Cuero sintético PU, cuero de microfibra y piel de silicona en carta de más de cuarenta colores. El color se define para cada proyecto.

Especificaciones sujetas a confirmación según configuración y mercado. Consulte la disponibilidad de documentación técnica y regulatoria.



**Cuando el equipo adecuado
acompaña cada movimiento,
cuidar es más sencillo.**

Solicite una propuesta

Un solo mensaje. Una sola contraparte. Movilidad, cuidado hospitalario y odontología coordinados por COMSACEBE LLC.

COMSACEBE LLC

INTEGRADORES DE SALUD

+1 786 918 0286 · ceo@comsacebe.com

www.comsacebe.com

2150 N Bayshore Dr, Miami, FL 33137



WWW.COMSACEBE.COM